



• profiles for floors


PROTERMINAL

POLISHED and SATINED
STAINLESS STEEL AISI 304/1.4301-V2A

PROTERMINAL is a professional edging profile used mainly to join similar or different floor materials (e.g. tiles/tiles – tiles/parquet/ marble/laminates/carpeting /linoleum, etc.) of differing thickness.

PROTERMINAL in stainless steel is also used to protect steps and decking, as a floor edging profile and skirting covering. Match with **PROLISTEL** strips in stainless steel AISI 304/1.4301-V2A with polished or satin finish and in aluminium with anodised or polished chrome finish.

profiles
for floors

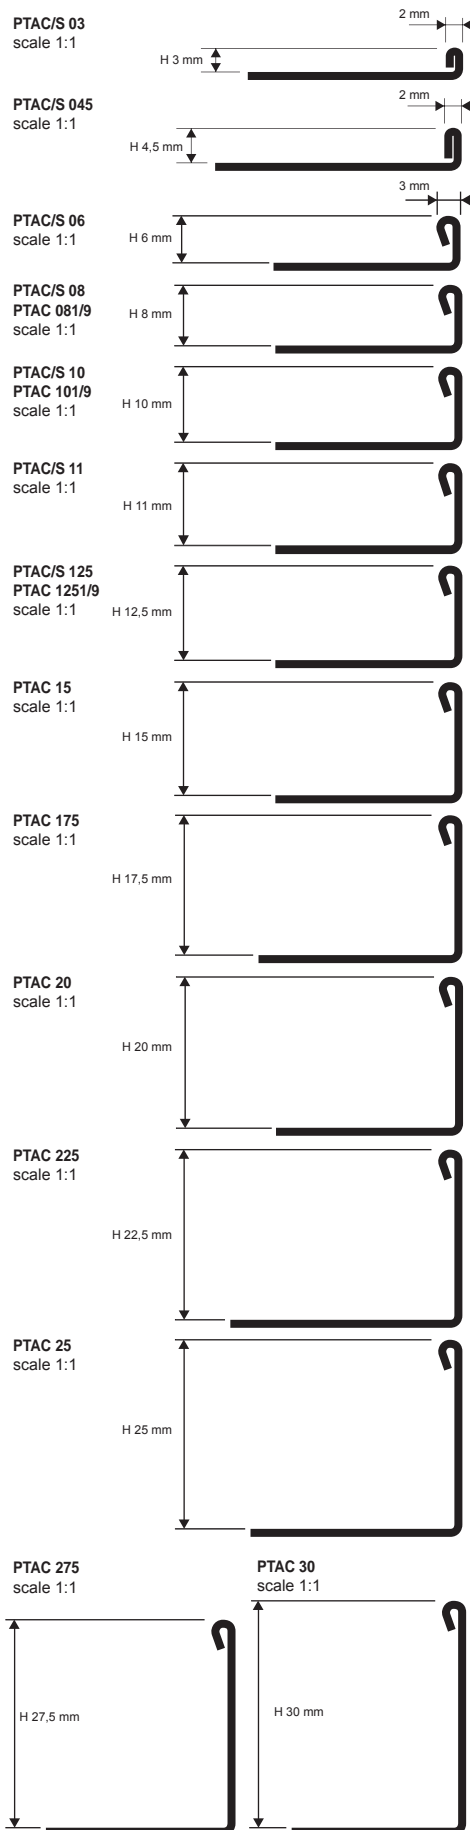

POLISHED STAINLESS STEEL AISI 304/1.4301-V2A with protective film
bar length 2,7 LM - packaging 40 Pcs - 108 LM
(H: 12,5÷30 mm - 30 Pcs - 81 LM) - 10/10mm

Article	H mm	€/LM	€/Pc
PTAC 03	3	7,19	19,41
PTAC 045	4,5	7,34	19,82
PTAC 06	6	7,65	20,66
PTAC 08	8	7,91	21,36
PTAC 10	10	8,32	22,46
PTAC 11	11	8,47	22,87
PTAC 125	12,5	8,63	23,30
PTAC 15	15	9,04	24,41
PTAC 175	17,5	9,55	25,79
PTAC 20	20	9,81	26,49
PTAC 225	22,5	10,42	28,13
PTAC 25	25	11,09	29,94
PTAC 275	27,5	11,50	31,05
PTAC 30	30	11,91	32,16

POLISHED STAINLESS STEEL AISI 304/1.4301-V2A with protective film
bar length 1 LM - packaging 40 Pcs - 40 LM - 10/10mm

Article	H mm	€/LM	€/Pc
PTAC 081	8		8,32
PTAC 101	10		8,68
PTAC 1251	12,5		9,04

POLISHED STAINLESS STEEL AISI 304/1.4301-V2A with protective film
bar length 0,90 LM - packaging 40 Pcs - 36 LM - 10/10mm

Article	H mm	€/LM	€/Pc
PTAC 089	8		7,50
PTAC 109	10		7,81
PTAC 1259	12,5		8,11



CURVE available, see page 172



SATINED STAINLESS STEEL AISI 304/1.4301-V2A with protective film
bar length 2,7 LM - packaging 40 Pcs - 108 LM
(H: 12,5÷20 mm - 30 Pcs - 81 LM) - 10/10mm

Article	H mm	€/LM	€/Pc
PTACS 03	3	8,37	22,60
PTACS 045	4,5	9,14	24,68
PTACS 06	6	9,45	25,52
PTACS 08	8	9,76	26,35
PTACS 10	10	10,12	27,32
PTACS 11	11	10,27	27,73
PTACS 125	12,5	10,48	28,30
PTACS 15	15	11,45	30,92
PTACS 20	20	11,71	31,62

COLOURS




AC - Polished stainless steel
AISI 304/1.4301-V2A

ACS - Satined stainless steel
AISI 304/1.4301-V2A

(for a precise assessment of colours and finishes, see the relative enclosed sheet)

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

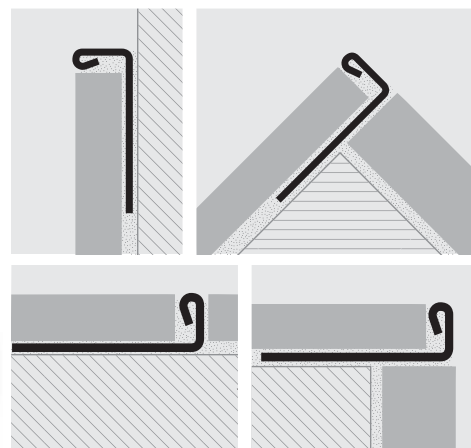

1. Choose the PROTERMINAL with the same height as the thickness of the covering. 2. Apply the adhesive onto the area of application of the profile. 3. Lay and align the profile pressing the perforated flange into the adhesive. 4. Lay the tiles, aligning them so that the top edge of the profile is "flush" with the tile. 5. Use the adhesive to seal any empty interstices.

SUITABLE FOR USE IN CONTACT WITH FOODSTUFFS

Prices are referred to whole packs. 10% increase for minimum orders of 10 pcs. 20% increase for orders of less than 10 pcs.

© 2011 All rights reserved by Progress Profiles. Printed in Italy

PROTERMINAL are manufactured with the same forms and sections, as well as in the very resistant material, the stainless shiny steel 316/1.4401-V4A, suitable for outdoors and marine environment with much presence of saltiness and considerable atmospheric agents. They are used as protection for the external angles of tiles, in order to separate or to create the separating joints in the pavements, to terminate the finishing of wall coverings, for platforms, stair steps, bathtubs, etc. They guarantee the impeccable work, ensuring considerable aesthetic effect as well. They strengthen the tile edge and prevents from chipping and breakages. Required by new European regulations on safety and accident prevention in public and private places.



POLISHED STAINLESS STEEL AISI 316/1.4404-V4A with protective film
bar length 2,7 LM - packaging 30 Pcs - 81 LM - 10/10mm

Article	H mm	€/LM	€/Pc
PTACM 06	6	8,83	23,84
PTACM 08	8	9,04	24,41
PTACM 10	10	9,50	25,65
PTACM 125	12,5	10,48	28,30

COLOURS



AC - Polished stainless steel
AISI 316L/1.4404-V4A

(for a precise assessment of colours and finishes, see the relative enclosed sheet)

SUITABLE FOR USE IN CONTACT WITH FOODSTUFFS

PROTERMINAL is a professional edging profile used mainly to join similar or different floor materials (e.g. tiles/tiles - tiles/parquet/ marble/granite, etc.) of differing thickness.

PROTERMINAL in brass is also used to protect steps and decking, as a floor edging profile, to cover skirting, decking and worktops and to frame doormats.



NATURAL BRASS thermo packed 10 Pcs

bar length 2,7 LM - packaging 40 Pcs - 108 LM (H 12,5±20 mm - 20 Pcs 54 LM)

Article	H mm	€/LM	€/Pc
PTON 06	6	6,68	18,04
PTON 08	8	7,09	19,14
PTON 10	10	7,60	20,52
PTON 125	12,5	8,21	22,17
PTON 15	15	8,83	23,84
PTON 20	20	10,37	28,00

NATURAL BRASS thermo packed 10 Pcs

bar length 1 LM - packaging 40 Pcs - 40 LM

Article	H mm	€/LM	€/Pc
PTON 061	6		7,09
PTON 081	8		7,50
PTON 101	10		8,03
PTON 1251	12,5		8,58

PTON 101 : PRODUCTION ON REQUEST

NATURAL BRASS thermo packed 10 Pcs

bar length 0,90 LM - packaging 40 Pcs - 36 LM

Article	H mm	€/LM	€/Pc
PTON 069	6		6,42
PTON 089	8		6,78
PTON 109	10		7,27
PTON 1259	12,5		7,73

POLISHED BRASS thermo packed 10 Pcs

bar length 2,7 LM - packaging 40 Pcs - 108 LM (H 12,5 mm - 20 pcs - 54 LM)


Article	H mm	€/LM	€/Pc
PTOL 08	8	9,20	24,84
PTOL 10	10	9,90	26,73
PTOL 125	12,5	10,70	28,89

PRODUCTION ON REQUEST

COLOURS




ON - Natural brass



OL - Polished brass

Chrome-plated
Brass version
page 33

(for a precise assessment of colours and finishes, see the relative enclosed sheet)

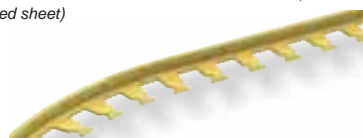


CURVE available, see page 178

LAYING INSTRUCTIONS


1. Choose the PROTERMINAL with the same height as the thickness of the floor/wall covering. 2. Apply the adhesive onto the area of application of the profile. 3. Lay and align the profile pressing the perforated flange into the adhesive. 4. Lay the tiles, aligning them so that the top edge of the profile is "flush" with the tile. Use the adhesive to seal any empty interstices. Oxidation marks may be easily removed by polishing the profiles with specific products to be found on sale such as Sidol, Smac and similar.

PROTERMINAL

POLISHED STAINLESS STEEL
AISI 316L/1.4404-V4A

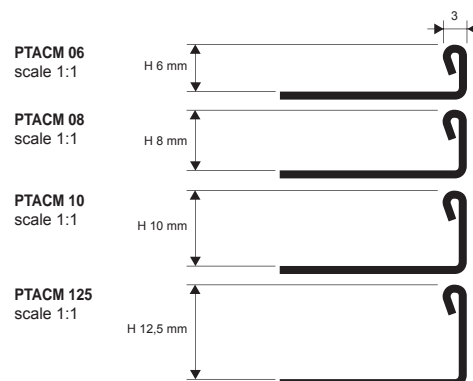


EXAMPLES OF LAYING

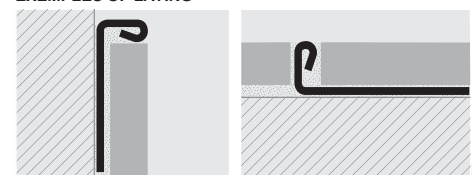


PROTERMINAL

NATURAL BRASS

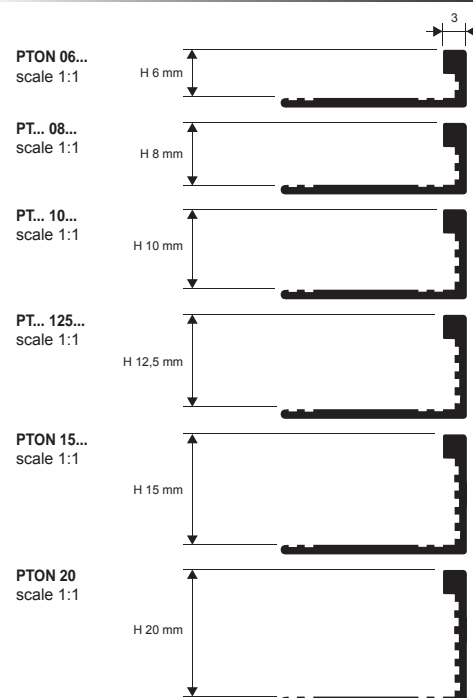

EXAMPLES OF LAYING

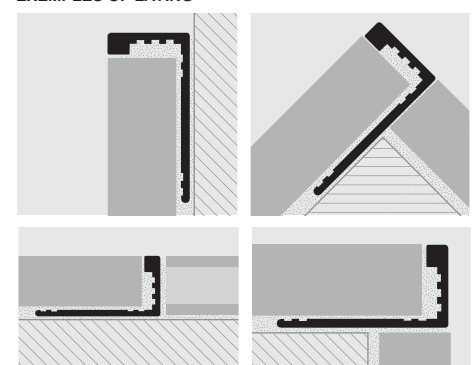


PROTERMINAL

NATURAL ALUMINIUM and
ANODISED ALUMINIUM SILVER

PROTERMINAL is a professional edging profile designed to protect and decorate the outside corners of tile, mosaic and marble coverings of differing thickness.

PROTERMINAL in aluminium is also used to join different floor materials and to protect steps and decking. Excellent as the edging trim skirtings and for bathroom and kitchen wall coverings. Match with **PROLISTEL ALL** strips in anodised aluminium with silver and polished chrome finish and with **PROLISTEL ACC** strips in AISI 304-1.4301 stainless steel with polished or satin finish.

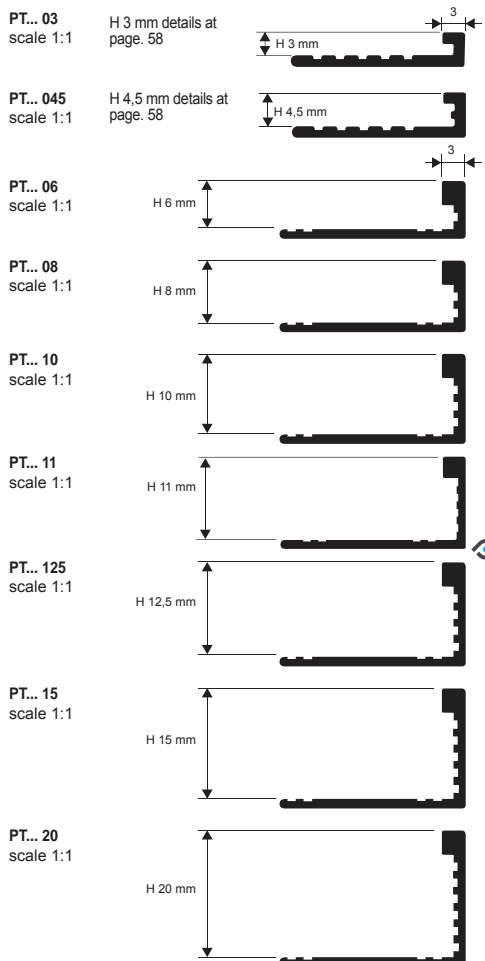

NATURAL ALUMINIUM thermo packed 10 Pcs
bar length 2,7 LM - packaging 40 Pcs - 108 LM

Article	H mm	€/LM	€/Pc
PTAN 06	6	2,36	6,37
PTAN 08	8	2,46	6,64
PTAN 10	10	2,57	6,94
PTAN 11	11	2,65	7,16
PTAN 125	12,5	2,72	7,34
PTAN 15	15	2,98	8,05
PTAN 20	20	3,49	9,42

ANODISED ALUMINIUM SILVER thermo packed
bar length 2,7 LM - packaging 40 Pcs - 108 LM

Article	H mm	€/LM	€/Pc
PTAA 06	6	3,24	8,75
PTAA 08	8	3,29	8,88
PTAA 10	10	3,49	9,42
PTAA 11	11	3,80	10,26
PTAA 125	12,5	4,01	10,83
PTAA 15	15	4,26	11,50
PTAA 20	20	4,98	13,45

NATURAL ALUMINIUM thermo packed 10 Pcs
bar length 0,90 LM - packaging 40 Pcs - 36 LM


Article	H mm	€/LM	€/Pc
PTAN 069	6		2,46
PTAN 089	8		2,57
PTAN 109	10		2,67
PTAN 1259	12,5		2,77

NATURAL ALUMINIUM thermo packed 10 Pcs
bar length 1 LM - packaging 40 Pcs - 40 LM

Article	H mm	€/LM	€/Pc
PTAN 061	6		3,03
PTAN 081	8		3,13
PTAN 101	10		3,24
PTAN 1251	12,5		3,44

PRODUCTION ON REQUEST

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

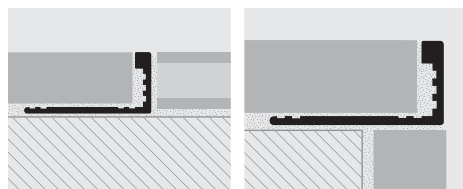

1. Choose the PROTERMINAL with the same height as the thickness of the covering. 2. Apply the adhesive onto the area of application of the profile. 3. Lay and align the profile pressing the perforated flange into the adhesive. 4. Lay the tiles, aligning them so that the top edge of the profile is "flush" with the tile. 5. Use the adhesive to seal any empty interstices.

COLOURS



(for a precise assessment of colours and finishes, see the relative enclosed sheet)

Polished version page 34
CURVE available, see page 173



PROLEVIGAL BRASS are separating profiles used to create the technical joint in the special types of pavements such as marble-Venice- palladium ones, that must be smoothed after their laying process. The particular "L" shape with the cut/drilled base and 2,5 mm thick vertical edge consent the perfect smoothing and constant thickness as well. Available in natural aluminium and natural brass, various thickness, as well in outlined/bent **PROLEVIGAL CURVES BRASS** versions.

PROLEVIGAL


NATURAL BRASS



NATURAL BRASS thermo packed 10 Pcs

bar length 2,7 LM - packaging 40 Pcs - 108 LM (H 15 - 17,5 - 20 mm - 54 LM)


Article	H mm	€/LM	€/Pc
PLGON 08	8	7,72	20,84
PLGON 10	10	8,04	21,71
PLGON 125	12,5	8,58	23,17
PLGON 15	15	9,34	25,22
PLGON 175	17,5	10,00	27,00
PLGON 20	20	10,97	29,62

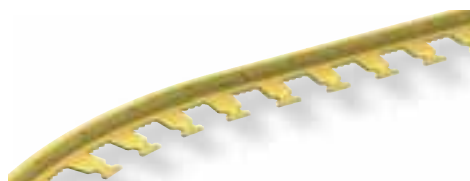

CURVE available

+30 % ON GROSS PRICES FOR CURVE VERSION.
ADD CV AFTER THE ARTICLE CODE.
Example: PLGON 08 (CURVE) PLGONCV 08

COLOURS



(for a precise assessment of colours and finishes, see the relative enclosed sheet)

PROLEVIGAL AL are separating profiles used to create the technical joint in the special types of pavements such as marble- Venice- palladium ones, that must be smoothed after their laying process. The particular "L" shape with the cut/drilled base and 2,5 mm thick vertical edge consent the perfect smoothing and constant thickness as well. Available in natural aluminium and natural brass, various thickness, as well in outlined/bent **PROLEVIGAL CURVE AL** versions.

PROLEVIGAL

NATURAL ALUMINIUM



NATURAL ALUMINIUM thermo packed 10 Pcs

bar length 2,7 LM - packaging 40 Pcs - 108 LM

Article	H mm	€/LM	€/Pc
PLGAN 045	4,5	2,16	5,83
PLGAN 06	6	2,36	6,37
PLGAN 08	8	2,62	7,07
PLGAN 10	10	2,67	7,21
PLGAN 125	12,5	2,93	7,91
PLGAN 15	15	3,24	8,75
PLGAN 175	17,5	3,59	9,69
PLGAN 20	20	3,75	10,13





CURVE available

+30 % ON GROSS PRICES FOR CURVE VERSION.
ADD CV AFTER THE ARTICLE CODE.
Example: PLGAN 08 (CURVES) PLGANCV 08


COLOURS

(for a precise assessment of colours and finishes, see the relative enclosed sheet)

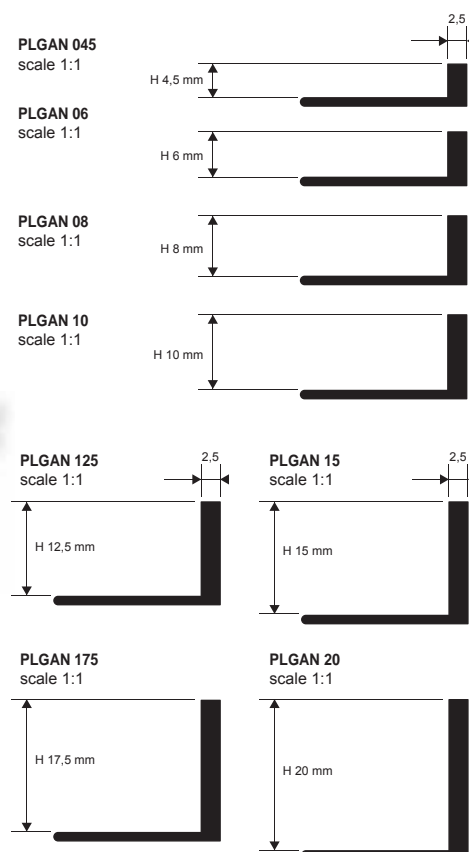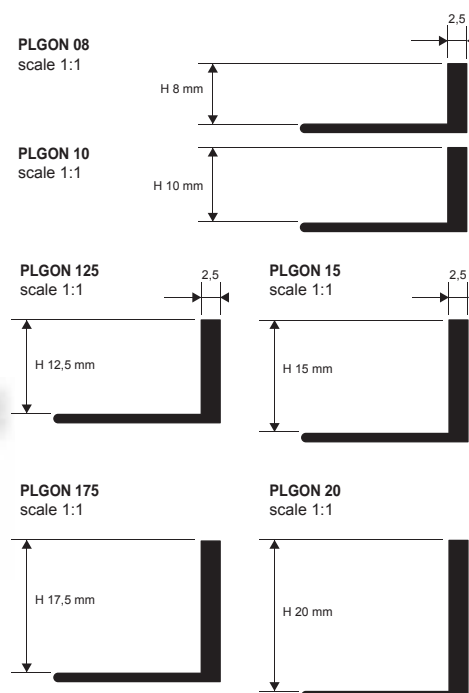


PROELEGANT

NATURAL, POLISHED and CHROMED
BRASS

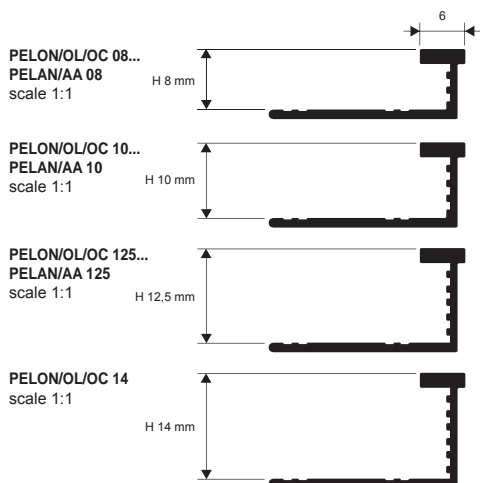

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

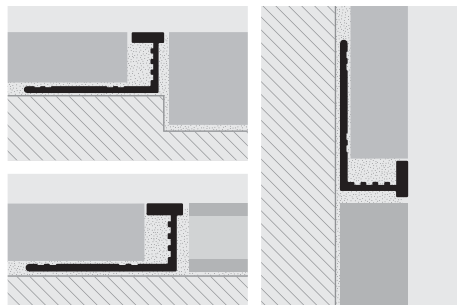

1. Choose the PROELEGANT with the same height as the thickness of the wall covering/floor. 2. Apply the adhesive onto the area of application of the profile. 3. Lay and align the profile pressing the perforated flange into the adhesive. 4. Lay the tiles, aligning them so that the top edge of the profile is "flush" with the tile. 5. Use the adhesive to seal any empty interstices. Oxidation marks may be easily removed by polishing the profiles with specific products to be found on sale such as Sidol, Smac and similar.

PROELEGANT is a refined profile, with 6 mm visible surface, designed to cover the joint between two types of floor covering, tiles - parquet, marble or granite, bestowing a prestige aesthetic effect that is ideal for indoor and outdoor finishes, even when subject to considerable loads. **PROELEGANT** is available in polished, natural and chromed brass. It is available in various heights in order to satisfy all technical, practical and, in particular, decorative requirements. The chromed version may be used as a decorative strip in the wall covering.



POLISHED BRASS thermo packed

bar length 2,7 LM - packaging 20 Pcs - 54 LM

Article	H mm	€/LM	€/Pc
PELOL 08	8	12,76	34,45
PELOL 10	10	13,11	35,40
PELOL 125	12,5	13,58	36,67
PELOL 14	14	14,04	37,91



CHROMED BRASS thermo packed

bar length 2,7 LM - packaging 20 Pcs - 54 LM

Article	H mm	€/LM	€/Pc
PELOC 08	8	16,08	43,42
PELOC 10	10	16,41	44,31
PELOC 125	12,5	16,85	45,50
PELOC 14	14	17,29	46,68

NATURAL BRASS thermo packed 10 Pcs

bar length 2,7 LM - packaging 20 Pcs - 54 LM

Article	H mm	€/LM	€/Pc
PELON 08	8	9,80	26,46
PELON 10	10	10,37	28,00
PELON 125	12,5	10,78	29,11
PELON 14	14	11,66	31,48

NATURAL BRASS thermo packed 5 Pcs

bar length 0,90 LM - packaging 40 Pcs - 36 LM

Article	H mm	€/LM	€/Pc
PELON 089	8		9,39 *
PELON 109	10		10,17 *
PELON 1259	12,5		10,58 *

COLOURS


(for a precise assessment of colours and finishes, see the relative enclosed sheet)



PROELEGANT

NATURAL ALUMINIUM and
ANODISED ALUMINIUM SILVER

EXAMPLES OF LAYING (for laying instructions, see above)

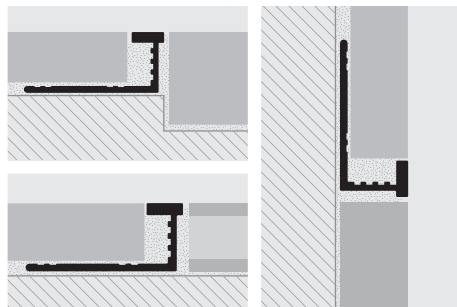

NATURAL ALUMINIUM thermo packed 10 Pcs

bar length 2,7 LM - packaging 40 Pcs - 108 LM

Article	H mm	€/LM	€/Pc
PELAN 08	8	4,01	10,83
PELAN 10	10	4,26	11,50
PELAN 125	12,5	4,52	12,20


ANODISED ALUMINIUM SILVER thermo packed

bar length 2,7 LM - packaging 40 Pcs - 108 LM

Article	H mm	€/LM	€/Pc
PELAA 08	8	5,03	13,58
PELAA 10	10	5,29	14,28
PELAA 125	12,5	5,55	14,99

COLOURS

(for a precise assessment of colours and finishes, see the relative enclosed sheet)



* = Upon request, price and delivery time to be agreed.

Prices are referred to whole packs. 10% increase for minimum orders of 10 pcs. 20% increase for orders of less than 10 pcs.



PROFINAL

POLISHED and SATINED
STAINLESS STEEL AISI 304/1.4301-V2A

PRFAC... 08
scale 1:1




PRFAC... 10
scale 1:1



PRFAC... 125
scale 1:1



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

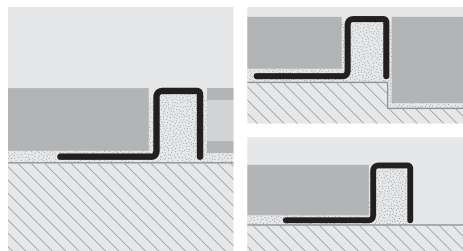

1. Choose the PROFINAL with the same height as the thickness of the covering. 2. Apply the adhesive onto the area of application of the profile. 3. Lay and align the profile pressing the perforated flange into the adhesive. 4. Lay the tiles, aligning them so that the top edge of the profile is "flush" with the tile. 5. Use the adhesive to seal any empty interstices.

PROFINAL is a profile in stainless steel AISI 304/1.4301-V2A polished or satined. It is available in three widths 8, 10 and 12.5 mm. Ideal for joining two types of floor on the same level (e.g. tile/tile or tile/wood), creating a decorative separating profile. It is also suitable as a step nosing or to create a decorative strip in the covering. It protects the edge and withstands high loads and frequent traffic.



POLISHED STAINLESS STEEL AISI 304/1.4301-V2A with protective film
bar length 2,7 LM - packaging 20 Pcs - 54 LM - 10/10mm

Article	H mm	€/LM	€/Pc
PRFAC 08	8	10,72	28,94
PRFAC 10	10	11,27	30,43
PRFAC 125	12,5	12,21	32,97



SATINED STAINLESS STEEL AISI 304/1.4301-V2A with protective film
bar length 2,7 LM - packaging 20 Pcs - 54 LM - 10/10mm

Article	H mm	€/LM	€/Pc
PRFACS 08	8	11,71	31,62
PRFACS 10	10	12,22	32,99
PRFACS 125	12,5	12,89	34,80

COLOURS

(for a precise assessment of colours and finishes, see the relative enclosed sheet)



SUITABLE FOR USE IN CONTACT WITH FOODSTUFFS

PROFINAL is a profile in natural, polished and chromed brass. It is available in three widths 8, 10 and 12.5 mm. Ideal for joining two types of floor on the same level (e.g. tile/tile or tile/wood), creating a decorative separating profile. It is also suitable as a step nosing or to create a decorative strip in the covering. It protects the edge and withstands high loads and frequent traffic.

PROFINAL

NATURAL, POLISHED and CHROMED
BRASS


PRFO... 08
scale 1:1



PRFO... 10
scale 1:1



PRFO... 11
scale 1:1



PRFO... 125
scale 1:1



PRFOC 15
scale 1:1



1. Choose the PROFINAL with the same height as the thickness of the covering. 2. Apply the adhesive onto the area of application of the profile. 3. Lay and align the profile pressing the perforated flange into the adhesive. 4. Lay the tiles, aligning them so that the top edge of the profile is "flush" with the tile. 5. Use the adhesive to seal any empty interstices. Oxidation marks may be easily removed by polishing the profiles with specific products to be found on sale such as Sidol, Smac and similar.



NATURAL BRASS thermo packed 5 Pcs
bar length 2,7 LM - packaging 20 Pcs - 54 LM



Article	H mm	€/LM	€/Pc
PRFON 08	8	10,53	28,43
PRFON 10	10	12,27	33,13
PRFON 125	12,5	13,53	36,53

CHROMED BRASS thermo packed
bar length 2,7 LM - packaging 20 Pcs - 54 LM (H 15 mm - 40,5 LM)

Article	H mm	€/LM	€/Pc
PRFOC 08	8	16,95	45,77
PRFOC 10	10	18,69	50,46
PRFOC 11	11	19,62	52,97
PRFOC 125	12,5	20,23	54,62
PRFOC 15	15	21,36	57,67

COLOURS


(for a precise assessment of colours and finishes, see the relative enclosed sheet)



POLISHED BRASS thermo packed
bar length 2,7 LM - packaging 20 Pcs - 54 LM

Article	H mm	€/LM	€/Pc
PRFOL 08	8	13,29	35,88
PRFOL 10	10	14,18	38,29
PRFOL 125	12,5	15,11	40,80

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

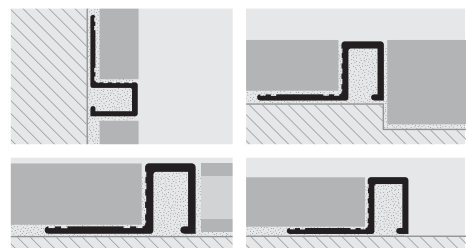

PROFINAL is a profile in natural and anodised silver aluminium. It is available in three widths 8, 10 and 12.5 mm. Ideal for joining two types of floor on the same level (e.g. tile/tile or tile/wood), creating a decorative separating profile. It is also suitable as a step nosing or to create a decorative strip in the covering. It protects the edge and withstands high loads and frequent traffic.

PROFINAL

NATURAL ALUMINIUM and
ANODISED ALUMINIUM SILVER



NATURAL ALUMINIUM thermo packed 10 Pcs
bar length 2,7 LM - packaging 40 Pcs - 108 LM



Article	H mm	€/LM	€/Pc
PRFAN 08	8	4,11	11,10
PRFAN 10	10	4,42	11,93
PRFAN 125	12,5	4,67	12,61

ANODISED ALUMINIUM SILVER thermo packed
bar length 2,7 LM - packaging 40 Pcs - 108 LM


Article	H mm	€/LM	€/Pc
PRFAA 08	8	5,44	14,69
PRFAA 10	10	5,70	15,39
PRFAA 125	12,5	5,96	16,09

COLOURS

(for a precise assessment of colours and finishes, see the relative enclosed sheet)

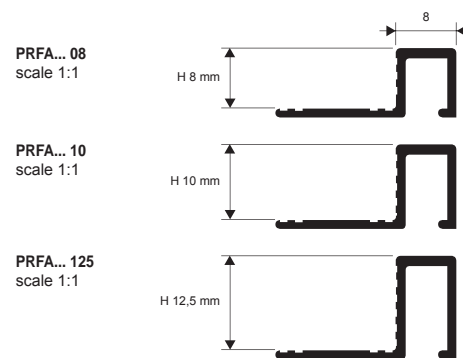

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

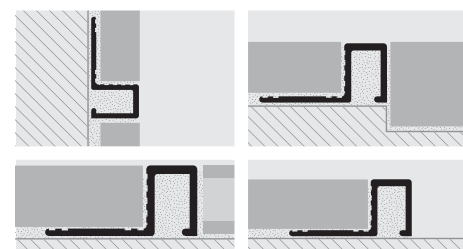

1. Choose the PROFINAL with the same height as the thickness of the covering. 2. Apply the adhesive onto the area of application of the profile. 3. Lay and align the profile pressing the perforated flange into the adhesive. 4. Lay the tiles, aligning them so that the top edge of the profile is "flush" with the tile. 5. Use the adhesive to seal any empty interstices. Oxidation marks may be easily removed by polishing the profiles with specific products to be found on sale such as Sidol, Smac and similar.




NATURAL BRASS
bar length 3 LM - packaging 20 Pcs - 60 LM

Article	H x L mm	€/LM	€/Pc
PQEON 108	10 x 8	17,25	51,75

PRODUCTION ON REQUEST


COLOURS



(for a precise assessment of colours and finishes, see the relative enclosed sheet)

PROSQUARE

NATURAL BRASS




POLISHED or CHROMED BRASS thermo packed
bar length 2,7 LM - packaging 20 Pcs - 54 LM (PGAOC 10: 27 LM)

Article	L x H mm	€/LM	€/Pc
PGAOC 10 (chromed)	10 x 10	20,71	55,92
PGAOL 10 (polished)	10 x 10	16,64	44,93

PRODUCTION ON REQUEST


COLOURS



(for a precise assessment of colours and finishes, see the relative enclosed sheet)


PROANGLE

CHROMED or POLISHED BRASS




PROJOINT

NATURAL BRASS

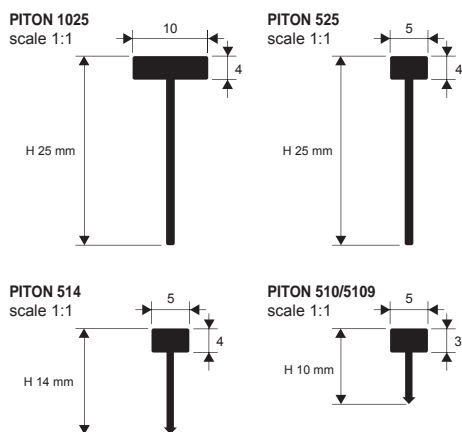

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

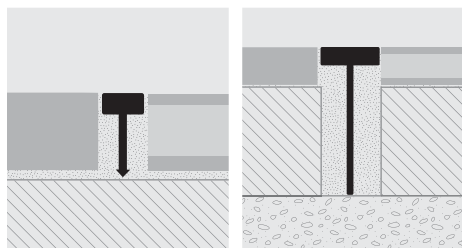

1. Choose the PROJOINT with the same height as the thickness of the floor. 2. Cut the profile to the necessary length and place it along the edge of the laid floor or insert it from above. 3. Continue the laying "flush" with the PROJOINT.


PROJOINT is a natural brass joint for joining two floors laid with mortar or glue/adhesive. The head thickness allows perfect smoothing and sanding of over 3 mm. It is usually used for tile-wood-marble-Venetian-Palladian floors. Available in various heights and widths. The vertical arrowhead part in the PIT 510 and PIT 514 glue version allows excellent anchorage with the adhesive.



POLISHABLE NATURAL BRASS thermo packed 10 Pcs
bar length 2,7 LM - pack. 20 Pcs - 54 LM

Article	W x H mm	€/LM	€/Pc
PITON 1025	10 x 25	13,04	35,21
PITON 525	5 x 25	6,98	18,85
PITON 514	5 x 14	6,68	18,04
PITON 510	5 x 10	5,91	15,96

COLOURS



(for a precise assessment of colours and finishes, see the relative enclosed sheet)



POLISHABLE NATURAL BRASS
bar length 0,90 LM - pack. 40 Pcs




Article	W x H mm	€/LM	€/Pc
PITON 5109	5 x 10		12,84


CONSISTING OF 1 ECOBLISTER WITH 2 PCS. OF 0.90 LM

PROJOINT

NATURAL ALUMINIUM

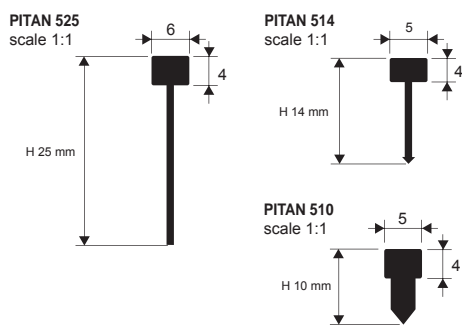

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

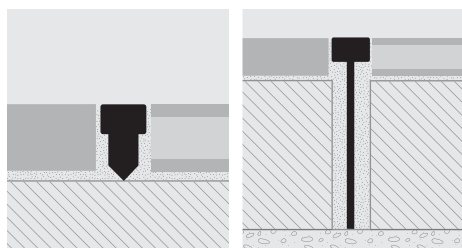

1. Choose the PROJOINT with the same height as the thickness of the floor. 2. Cut the profile to the necessary length and place it along the edge of the laid floor or insert it from above. 3. Continue the laying "flush" with the PROJOINT.

PROJOINT is a natural aluminium joint for joining two floors laid with mortar or glue/adhesive. The head thickness allows perfect smoothing and sanding of over 3 mm. It is usually used for tile-wood-marble-Venetian-Palladian floors. Available in various heights and widths. The vertical arrowhead part in the PIT 510 and PIT 514 glue version allows excellent anchorage with the adhesive.



NATURAL ALUMINIUM thermo packed 10 Pcs
bar length 2,7 LM - packaging 40 Pcs - 108 LM

Article	W x H mm	€/LM	€/Pc
PITAN 525	6 x 25	2,82	7,61
PITAN 514	5 x 14	2,57	6,94
PITAN 510	5 x 10	2,11	5,70

COLOURS



(for a precise assessment of colours and finishes, see the relative enclosed sheet)


PROCANAL is a channel for joining floors and also for use as strips in wall coverings. This profile is made in natural, polished and chromed brass as well as natural or anodised silver aluminium. It is also used as a cable channel for the insertion of wires and conduits in all types of floor.

PROCANAL

NATURAL, POLISHED and CHROMED BRASS
NATURAL and ANODISED SILVER ALUMINIUM



PCL... 10
scale 1:1



NATURAL BRASS thermo packed 10 Pcs
POLISHED and CHROMED BRASS thermo packed
bar length 2,7 LM - packaging 40 Pcs - 108 LM (PCLOC 10 - 81 LM)

Article	W x H mm	€/LM	€/Pc
PCLON 10 (natural)	10 x 10	10,06	27,16
PCLOL 10 (polished)	10 x 10	11,40	30,78
PCLOC 10 (chromed)	10 x 10	16,07	43,39

NATURAL ALUMINIUM thermo packed 10 Pcs
ANODISED SILVER ALUMINIUM thermo packed
bar length 2,7 LM - packaging 40 Pcs - 108 LM

Article	W x H mm	€/LM	€/Pc
PCLAN 10 (natural)	10 x 10	2,33	6,29
PCLAA 10 (anod. silver)	10 x 10	3,11	8,40

Available Stainless steel AISI 304/1.4301-V2A
"PROLISTEL" 10x10 PLTAC 10 / PLTACS 10 (page 36)

COLOURS

(for a precise assessment of colours and finishes, see the relative enclosed sheet)



PROFLAT is a range of 20 and 40 mm natural brass or steel strips 3 mm thick. Ideal for dividing up flooring on the same level, they may be polished in situ and also curved/shaped to create decorative patterns that are particularly recommended for marble, Palladian, Venetian and cement or resin-based floors.

PROFLAT

STAINLESS STEEL AISI 304/1.4301-V2A
NATURAL BRASS



STAINLESS STEEL AISI 304/1.4301-V2A
bar length 2 LM - packaging 15 Pcs - 30 LM

Article	W x H mm	€/LM	€/Pc
GPLAC 2032	3 x 20	9,76	19,52
GPLAC 4032	3 x 40	15,92	31,84

STAINLESS STEEL AISI 304/1.4301-V2A
bar length 4 LM - packaging 15 Pcs - 60 LM

Article	W x H mm	€/ML	€/Pce
GPLAC 2034	3 x 20	9,76	39,04
GPLAC 4034	3 x 40	15,92	63,68


STAINLESS STEEL AISI 304/1.4301-V2A
bar length 3 LM - packaging 15 Pcs - 45 LM (GPLAC 505 - 15 LM)

Article	W x H mm	€/LM	€/Pc
GPLAC 205	5 x 20	14,89	44,67
GPLAC 505	5 x 50	31,32	93,96

POLISHABLE NATURAL BRASS
bar length 2,7 LM - packaging 15 Pcs - 40,5 LM

Article	W x H mm	€/LM	€/Pc
GPLON 2025	2,5 x 20	10,83	29,24
GPLON 4025	2,5 x 40	14,38	38,83

COLOURS




(for a precise assessment of colours and finishes, see the relative enclosed sheet)

1. Choose PROFLAT with the same height as the thickness of the floor.
2. Cut the profile to the necessary length and place it along the edge of the laid floor or insert it from above.
3. Continue the laying "flush" with the PROFLAT.

SUITABLE FOR USE IN CONTACT WITH FOODSTUFFS


Prices are referred to whole packs. 10% increase for minimum orders of 10 pcs. 20% increase for orders of less than 10 pcs.

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

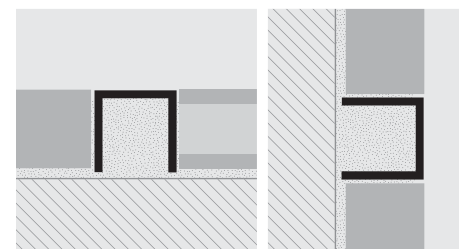


1. Choose the profile in the required material and finish.
2. Apply the adhesive onto the area of application.
3. Lay the PROCANAL.
4. Continue laying by aligning it "flush" with the covering.
5. Use the adhesive to seal any empty interstices. Oxidation marks may be easily removed by polishing the profiles with specific products to be found on sale such as Sidol, Smac and similar.


GPLAC 203/ 205
scale 1:1




GPLON 2025
scale 1:1




GPLAC 403/ 505
scale 1:1



GPLON 4025
scale 1:1




EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

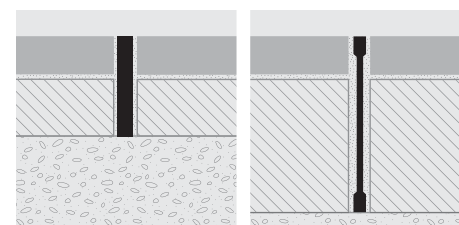

PROSLIDER

POLISHED and SATINED
STAINLESS STEEL AISI 304/1.4301-V2A

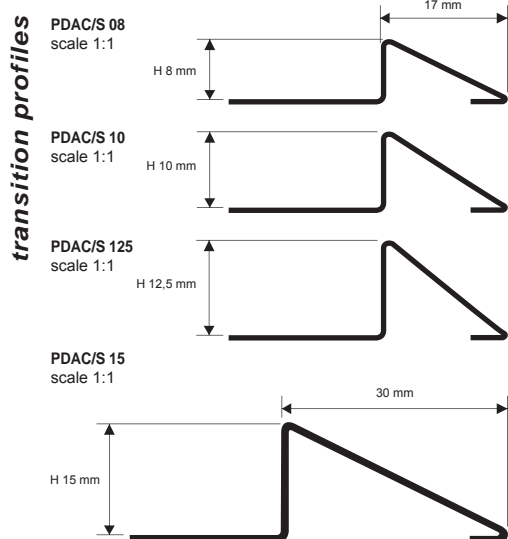

PROSLIDER is a sloping terminal transition profile in stainless steel AISI 304/1.4301-V2A designed to join different height floors in a perfect, stepless way. This particularly sturdy profile with the bent base sloping inwards withstands and supports high loads and frequent passage of manual trolleys and vehicles in addition to protecting the edge of the higher floor.

PROSLIDER is used in particular to join tile or wood to an existing floor.
Available in AISI 304/1.4301-V2A stainless steel in various heights to accommodate all differences in level.



POLISHED STAINLESS STEEL AISI 304/1.4301-V2A with protective film
bar length 2,7 LM - packaging 20 Pcs - 54 LM - 10/10mm


Article	H mm	€/LM	€/Pc
PDAC 08	8	10,77	29,08
PDAC 10	10	11,64	31,43
PDAC 125	12,5	13,31	35,94
PDAC 15	15	16,64	44,93



SATINED STAINLESS STEEL AISI 304/1.4301-V2A with protective film
bar length 2,7 LM - packaging 20 Pcs - 54 LM - 10/10mm

Article	H mm	€/LM	€/Pc
PDACS 08	8	13,40	36,18
PDACS 10	10	14,17	38,26
PDACS 125	12,5	16,89	45,60
PDACS 15	15	17,96	48,49

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

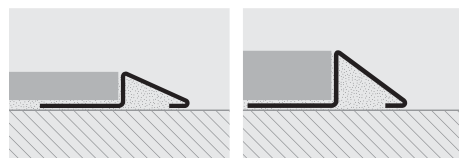

1. Choose the profile with the required height and finish. 2. Fill the profile cavity with adhesive and apply the adhesive onto the area of application. 3. Lay the PROSLIDER. 4. Align it "flush" with the floor/covering. 5. Use the adhesive to seal any empty interstices.

COLOURS




(for a precise assessment of colours and finishes, see the relative enclosed sheet)

SUITABLE FOR USE IN CONTACT WITH FOODSTUFFS

PROSLIDER

NATURAL and POLISHED BRASS

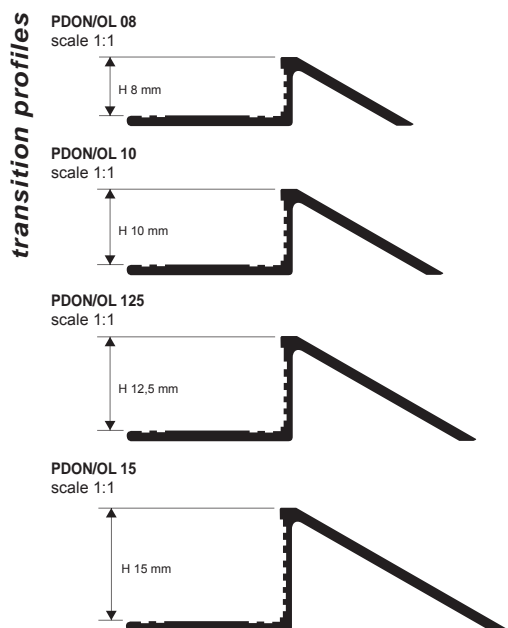

NATURAL BRASS thermo packed 5 Pcs
bar length 2,7 LM - packaging 20 Pcs - 54 LM


Article	H mm	€/LM	€/Pc
PDON 08	8	10,93	29,51
PDON 10	10	12,55	33,89
PDON 125	12,5	15,68	42,34
PDON 15	15	19,16	51,73



POLISHED BRASS thermo packed
bar length 2,7 LM - packaging 20 Pcs - 54 LM

Article	H mm	€/LM	€/Pc
PDOL 08	8	13,94	37,64
PDOL 10	10	15,56	42,01
PDOL 125	12,5	18,68	50,44
PDOL 15	15	21,88	59,08

EXEMPLES OF LAYING



LAYING INSTRUCTIONS

1. Choose the profile with the required height H, material and finish. 2. Fill the profile cavity with adhesive and apply the adhesive onto the area of application. 3. Lay the PROSLIDER. 4. Align it "flush" with the floor/covering. 5. Use the adhesive to seal any empty interstices. Oxidation marks on profiles in natural and polished brass may be easily removed by polishing the profiles with specific products to be found on sale such as Sidol, Smac and similar.

COLOURS



(for a precise assessment of colours and finishes, see the relative enclosed sheet)

PROSLIDER is a sloping terminal transition profile designed to join different height floors in a perfect, stepless way. This particularly sturdy profile withstands and supports high loads and frequent passage of manual trolleys and vehicles in addition to protecting the edge of the higher floor. **PROSLIDER** is used in particular to join tile or wood to an existing floor. Available in natural and anodised silver aluminium in various heights to accommodate all differences in level.

PROSLIDER

NATURAL and ANODISED SILVER ALUMINIUM



NATURAL ALUMINIUM thermo packed 5 Pcs
bar length 2,7 LM - packaging 40 Pcs - 108 LM


Article	H mm	€/LM	€/Pc
PDAN 08	8	3,59	9,69
PDAN 10	10	4,06	10,96
PDAN 125	12,5	4,72	12,74




ANODISED SILVER ALUMINIUM thermo packed
bar length 2,7 LM - packaging 40 Pcs - 108 LM

Article	H mm	€/LM	€/Pc
PDAA 08	8	5,19	14,01
PDAA 10	10	5,55	14,99
PDAA 125	12,5	6,06	16,36

COLOURS




(for a precise assessment of colours and finishes, see the relative enclosed sheet)

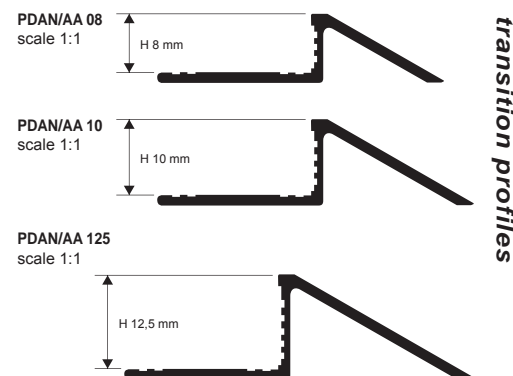

transition profiles

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

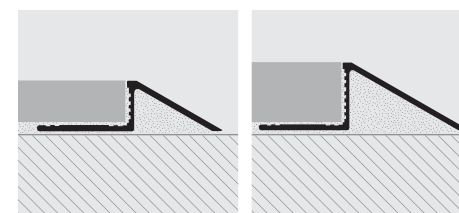

1. Choose the profile with the required height H, material and finish.
2. Fill the profile cavity with adhesive and apply the adhesive onto the area of application.
3. Lay the PROSLIDER.
4. Align it "flush" with the floor/covering.
5. Use the adhesive to seal any empty interstices.

PROSLIDER LR

NATURAL and ANODISED SILVER ALUMINIUM




NATURAL ALUMINIUM thermo packed 5 Pcs
bar length 2,7 LM - packaging 20 Pcs - 54 LM

Article	H mm	€/LM	€/Pc
PDLRAN 10	10	10,32	27,86
PDLRAN 125	12,5	12,84	34,67
PDLRAN 15	15	14,74	39,80




ANODISED SILVER ALUMINIUM thermo packed
bar length 2,7 LM - packaging 20 Pcs - 54 LM

Article	H mm	€/LM	€/Pc
PDLRAA 10	10	13,45	36,32
PDLRAA 125	12,5	15,15	40,91
PDLRAA 15	15	17,41	47,01

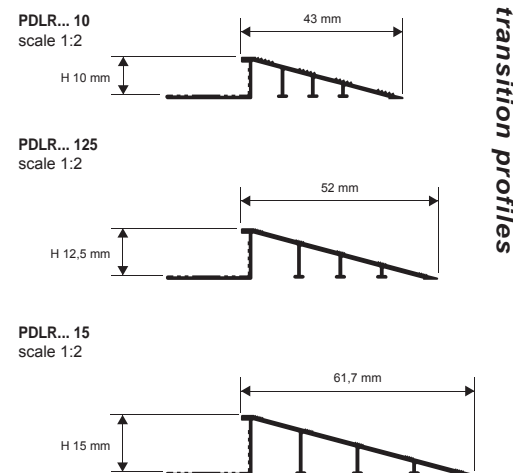

transition profiles

COLOURS




(for a precise assessment of colours and finishes, see the relative enclosed sheet)

LAYING INSTRUCTIONS

1. Choose the profile with the required height H, material and finish.
2. Fill the profile cavity with adhesive and apply the adhesive onto the area of application.
3. Lay the PROSLIDER LR.
4. Align it "flush" with the floor/covering.
5. Use the adhesive to seal any empty interstices.


EXAMPLES OF LAYING

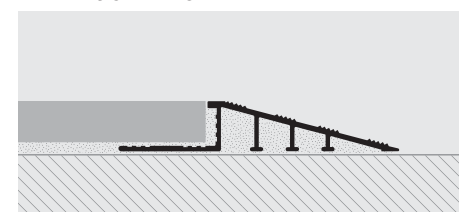


PROSLIDER WOOD

NATURAL OAK
with ALUMINIUM BASE

transition profiles

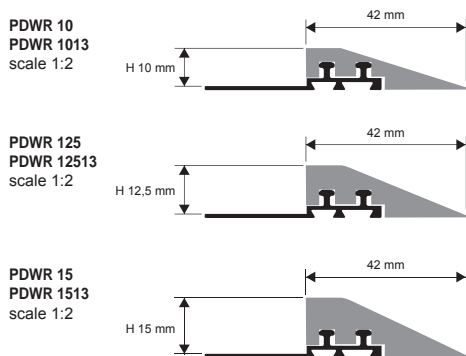

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

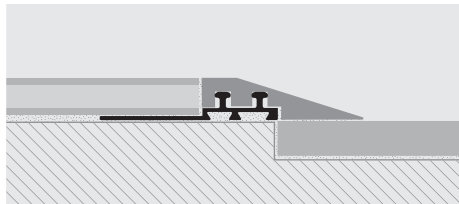

1. Choose the PROSLIDER WOOD with the required height. 2. Apply the adhesive onto the area of application of the profile. 3. Lay and align the profile pressing the perforated flange into the adhesive. 4. Align it "flush" with the floor/covering. 5. Use the adhesive to seal any empty interstices.

PROSLIDER WOOD is a sloping terminal transition profile in real natural oak with glued-on, punched aluminium base, designed to join different height floors in a perfect, stepless way. This particularly sturdy profile withstands and supports high loads and frequent passage of manual trolleys and vehicles in addition to protecting the edge of the higher floor. Available in various heights to accommodate all differences in level.



NATURAL OAK with ALUMINIUM BASE
bar length 2,7 LM - packaging 10 Pcs - 27 LM

Article	H mm	€/LM	€/Pc
PDWR 10	10	18,20	49,14
PDWR 125	12,5	21,26	57,40
PDWR 15	15	25,47	68,77



NATURAL OAK with ALUMINIUM BASE
bar length 1,35 LM - packaging 20 Pcs - 27 LM

Article	H mm	€/LM	€/Pc
PDWR 1013	10		27,01 *
PDWR 12513	12,5		31,57 *
PDWR 1513	15		34,40 *

COLOURS



(for a precise assessment of colours and finishes, see the relative enclosed sheet)



PROCARPET ACC is a profile in stainless steel 304/1.4301-V2A used for joining two floors of differing thickness and in particular for joining a tiled or parquet floor to wall-to-wall carpeting, making a perfect joint thanks to the vertical part of less than 4 mm. In addition to completely protecting the edge of the higher floor, this particularly sturdy profile withstands high loads and supports the frequent passage of manual trolleys, vehicles and intense pedestrian traffic.



POLISHED STAINLESS STEEL AISI 304/1.4301-V2A with protective film
bar length 2,7 LM - packaging 20 Pcs - 54 LM - 10/10mm

Article	H mm	€/LM	€/Pc
PRTAC 08	8	8,80	23,76
PRTAC 10	10	9,66	26,08
PRTAC 125	12,5	12,43	33,56



SATINATED STAINLESS STEEL AISI 304/1.4301-V2A with protective film
bar length 2,7 LM - packaging 20 Pcs - 54 LM - 10/10mm

Article	H mm	€/LM	€/Pc
PRTACS 08	8	10,99	29,67
PRTACS 10	10	12,07	32,59
PRTACS 125	12,5	15,51	41,88

COLOURS



(for a precise assessment of colours and finishes, see the relative enclosed sheet)

LAYING INSTRUCTIONS

1. Choose the PROCARPET taking into consideration the exact height of the floor. 2. Using a notched spreader apply the adhesive onto the area of application of the profile. 3. Lay and align the profile, cut to the necessary length, pressing the perforated flange into the adhesive. 4. Lay the tiles, aligning them so that the top edge of the profile is "flush" with the tile. 5. Fill the profile/tile area of contact with adhesive to prevent the accumulation of water in any voids.

SUITABLE FOR USE IN CONTACT WITH FOODSTUFFS

PROCARPET OTT is a profile in brass (natural or polished) used for joining two floors of differing thickness and in particular for joining a tiled or parquet floor to wall-to-wall carpeting, making a perfect joint thanks to the vertical part of less than 4 mm. In addition to completely protecting the edge of the higher floor, this particularly sturdy profile withstands high loads and supports the frequent passage of manual trolleys, vehicles and intense pedestrian traffic.



NATURAL BRASS thermo packed 5 Pcs
bar length 2,7 LM - packaging 20 Pcs - 54 LM


Article	H mm	€/LM	€/Pc
PRTON 08	8	11,96	32,29
PRTON 10	10	13,58	36,67



POLISHED BRASS thermo packed 5 Pcs
bar length 2,7 LM - packaging 20 Pcs - 54 LM

Article	H mm	€/LM	€/Pc
PRTOL 08	8	14,95	40,37
PRTOL 10	10	16,58	44,77

COLOURS




(for a precise assessment of colours and finishes, see the relative enclosed sheet)

PROCARPET ACC

STAINLESS STEEL AISI 304/1.4301-V2A


PRTAC/S 08
scale 1:1



PRTAC/S 10
scale 1:1




PRTAC/S 125
scale 1:1

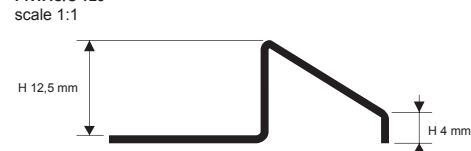

transition profiles

profiles
for floors

EXAMPLES OF LAYING

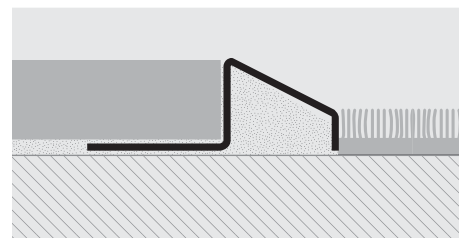


PROCARPET OTT

NATURAL and POLISHED BRASS

PRTON/OL 08
scale 1:1




PRTON/OL 10
scale 1:1



transition profiles

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

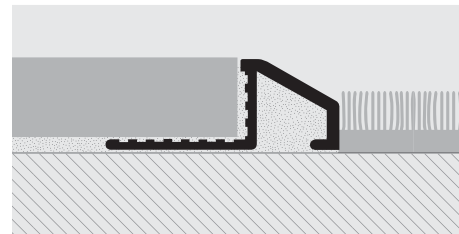


1. Choose the PROCARPET taking into consideration the exact height of the floor. 2. Using a notched spreader apply the adhesive onto the area of application of the profile. 3. Lay and align the profile, cut to the necessary length, pressing the perforated flange into the adhesive. 4. Lay the tiles, aligning them so that the top edge of the profile is "flush" with the tile. 5. Fill the profile/tile area of contact with adhesive to prevent the accumulation of water in any voids.

Profiles in natural or polished brass may be subject to oxidation in environments with high degrees of humidity. Resulting marks may be easily removed by polishing the profiles with specific products to be found on sale such as Sidol, Smac and.


PROCARPET ALL

NATURAL and ANODISED SILVER ALUMINIUM

transition profiles

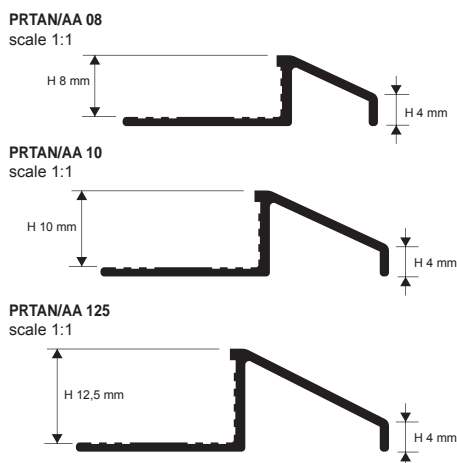

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

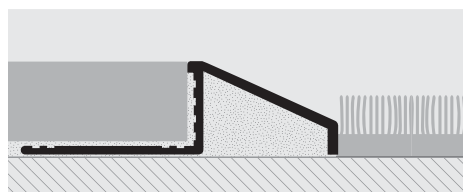

1. Choose the PROCARPET taking into consideration the exact height of the floor. 2. Using a notched spreader apply the adhesive onto the area of application of the profile. 3. Lay and align the profile, cut to the necessary length, pressing the perforated flange into the adhesive. 4. Lay the tiles, aligning them so that the top edge of the profile is "flush" with the tile. 5. Fill the profile/tile area of contact with adhesive to prevent the accumulation of water in any voids.

PROCARPET ALL is a profile in aluminium (natural or silver anodised) used for joining two floors of differing thickness and in particular for joining a tiled or parquet floor to wall-to-wall carpeting, making a perfect join thanks to the vertical part of less than 4 mm. In addition to completely protecting the edge of the higher floor, this particularly sturdy profile withstands high loads and supports the frequent passage of manual trolleys, vehicles and intense pedestrian traffic.



NATURAL ALUMINIUM thermo packed 5 Pcs
bar length 2,70 LM - packaging 20 Pcs - 54 LM


Article	H mm	€/LM	€/Pc
PRTAN 08	8	3,68	9,94
PRTAN 10	10	4,15	11,21
PRTAN 125	12,5	4,78	12,91



ANODISED SILVER ALUMINIUM thermo packed
bar length 2,70 LM - packaging 20 Pcs - 54 LM

Article	H mm	€/LM	€/Pc
PRTAA 08	8	4,31	11,64
PRTAA 10	10	5,08	13,72
PRTAA 125	12,5	6,01	16,23

COLOURS




(for a precise assessment of colours and finishes, see the relative enclosed sheet)


PROSKID

POLISHED BRASS and ANODISED SILVER ALUMINIUM

transition profiles

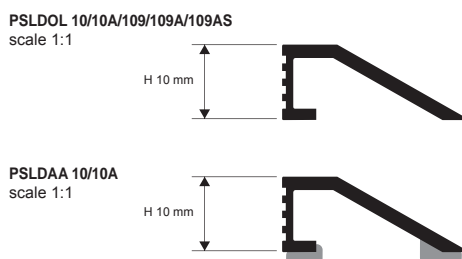

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

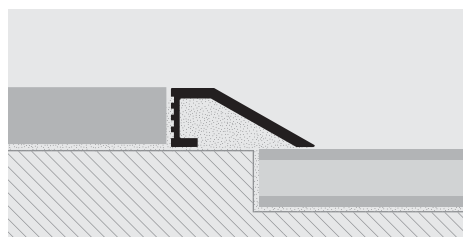

1. Using a notched spreader apply the adhesive onto the area of application of the profile and if necessary add silicone. 2. Lay and align the profile (cut to the necessary length) with the notched part against the floor to be joined. Profiles in natural or polished brass may be subject to oxidation in environments with high degrees of humidity. Resulting marks may be easily removed by polishing the profiles with specific products to be found on sale such as Sidol, Smac and similar.



POLISHED BRASS thermo packed
bar length 2,70 LM - packaging 20 Pcs - 54 LM

Article	H mm	€/LM	€/Pc
PSLDOL 10	10	14,69	39,66
PSLDOL 10A (with adhesive)	10	16,23	43,82

POLISHED BRASS thermo packed
bar length 0,90 LM - pack. 20 Pcs

Article	H mm	€/LM	€/Pc
PSLDOL 109AS (with adhesive)	10		18,28

POLISHED BRASS thermo packed
bar length 0,90 LM - pack. 20 Pcs


Article	H mm	€/LM	€/Pc
PSLDOL 109	10		16,02
PSLDOL 109A (with adhesive)	10		17,25



ANODISED SILVER ALUMINIUM thermo packed
bar length 2,70 LM - packaging 20 Pcs - 54 LM

Article	H mm	€/LM	€/Pc
PSLDAA 10	10	4,78	12,91
PSLDAA 10A (with adhesive)	10	5,85	15,80

COLOURS



(for a precise assessment of colours and finishes, see the relative enclosed sheet)


PROLEVALL 29 is a transition profile in anodised aluminium with silver-gold-bronze finish, available in the self-adhesive or punched versions. It is used to give a clean-cut, elegant finish when joining and compensating differences in level of floors that are already laid and in differing or same materials e.g. ceramic tiles-wood-parquet-marble, etc. It joins and compensates a thickness between 4 and 6mm. **PROLEVALL 29** ensures a perfect finish with little height, covering any flaws created during laying, while the contoured edges guarantee perfect adherence to the floor.

PROLEVALL 29


ANODISED gold, silver and bronze ALUMINIUM
SELF-ADHESIVE and PUNCHED



PLV... 29A
PLV... 298AS
PLV... 299AS
PLV... 2910AS
scale 1:1



PLV... 29F
PLV... 298FS
PLV... 299FS
PLV... 2910FS
scale 1:1



transition profiles

profiles
for floors

ANODISED ALUMINIUM with adhesive thermo packed
bar length 2,7 LM - pack. 40 Pcs - 108 LM

Article	H x L mm	€/LM	€/Pc
PLV... 29A	5,5 X 29	5,08	13,72

ANODISED ALUMINIUM with adhesive thermo packed
bar length 0,83 LM - pack. 20 Pcs

Article	H x L mm	€/LM	€/Pc
PLV... 298AS	5,5 X 29		4,98

ANODISED ALUMINIUM with adhesive thermo packed
bar length 0,93 LM - pack. 20 Pcs

Article	H x L mm	€/LM	€/Pc
PLV... 299AS	5,5 X 29		5,60

ANODISED ALUMINIUM with adhesive thermo packed
bar length 1,03 LM - pack. 20 Pcs

Article	H x L mm	€/LM	€/Pc
PLV... 2910AS	5,5 X 29		6,11

ANODISED ALUMINIUM punched thermo packed
bar length 2,7 LM - pack. 40 Pcs - 108 LM

Article	H x L mm	€/LM	€/Pc
PLV... 29F	5,5 X 29	3,95	10,67

ANODISED ALU. punched with screws and screw anchors thermo packed
bar length 0,83 LM - pack. 20 Pcs

Article	H x L mm	€/LM	€/Pc
PLV... 298FS	5,5 X 29		4,63

ANODISED ALU. punched with screws and screw anchors thermo packed
bar length 0,93 LM - pack. 20 Pcs

Article	H x L mm	€/LM	€/Pc
PLV... 299FS	5,5 X 29		4,72


ANODISED ALU. punched with screws and screw anchors thermo packed
bar length 1,03 LM - pack. 20 Pcs

Article	H x L mm	€/LM	€/Pc
PLV... 2910FS	5,5 X 29		5,24

Available in the finishes: AA - AO - AB (AT, CH and SB available upon request with a minimum quantity order of 540 LM). The code of the selected colour must be added to the article code. E.g.: PLV... 29A (chosen finish Anod. Gold) PLVAO 29A.

COLOURS

(for a precise assessment of colours and finishes, see the relative enclosed sheet)



UPON REQUEST-MINIMUM QUANTITY 540 LM

PROLEVALL 33 is a transition profile in extruded polished brass, available in the self-adhesive or punched versions. It is used to give a clean-cut, elegant finish when joining and compensating differences in level of floors that are already laid and in differing or same materials e.g. ceramic tiles-wood-parquet-marble, etc. It joins and compensates a thickness between 4 and 6mm. **PROLEVALL 33** ensures a perfect finish with little height, covering any flaws created during laying, while the contoured edges guarantee perfect adherence to the floor.

POLISHED BRASS with adhesive thermo packed
bar length 2,7 LM - pack. 20 Pcs - 54 LM

Article	H x L mm	€/LM	€/Pc
PLVOL 33A	5,5 X 33	12,73	34,37

POLISHED BRASS with adhesive thermo packed
bar length 0,83 LM - pack. 20 Pcs

Article	H x L mm	€/LM	€/Pc
PLVOL 338AS	5,5 X 33		11,50

POLISHED BRASS with adhesive thermo packed
bar length 0,93 LM - pack. 20 Pcs

Article	H x L mm	€/LM	€/Pc
PLVOL 339AS	5,5 X 33		12,84

POLISHED BRASS with adhesive thermo packed
bar length 1,03 LM - pack. 20 Pcs

Article	H x L mm	€/LM	€/Pc
PLVOL 3310AS	5,5 X 33		14,17

POLISHED BRASS punched thermo packed
bar length 2,7 LM - pack. 20 Pcs - 54 LM

Article	H x L mm	€/LM	€/Pc
PLVOL 33F	5,5 X 33	11,35	30,65

POLI. BRASS punched with screws and screw anchors thermo packed
bar length 0,83 LM - pack. 20 Pcs

Article	H x L mm	€/LM	€/Pc
PLVOL 338FS	5,5 X 33		10,68

POLI. BRASS punched with screws and screw anchors thermo packed
bar length 0,93 LM - pack. 20 Pcs


Article	H x L mm	€/LM	€/Pc
PLVOL 339FS	5,5 X 33		11,81

POLI. BRASS punched with screws and screw anchors thermo packed
bar length 1,03 LM - pack. 20 Pcs

Article	H x L mm	€/LM	€/Pc
PLVOL 3310SF	5,5 X 33		12,84



COLOURS

(for a precise assessment of colours and finishes, see the relative enclosed sheet)



Prices are referred to whole packs. 10% increase for minimum orders of 10 pcs. 20% increase for orders of less than 10 pcs.

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

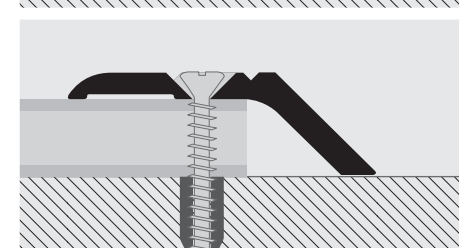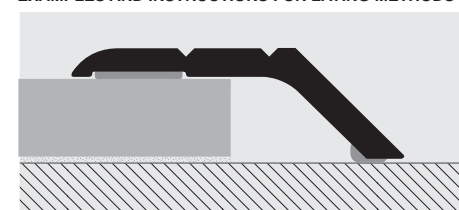

Adhesive version

1. Choose the suitable profile and cut it to the necessary length. 2. Degrease, wash and clean the solid surface thoroughly. 3. Remove the protective paper from the adhesive. 4. Lay the profile by applying pressure evenly over the whole surface without using a hammer.


Punched version

1. Choose the suitable profile and cut it to the necessary length. 2. Mark the position of the holes using the existing holes in the profile as reference. 3. Insert the screw anchors into the drilled holes. 4. Fix the profile using flathead screws suitable for the relative slots in the profile.


PROLEVALL 33

POLISHED BRASS
SELF-ADHESIVE and PUNCHED

PLVOL 33A
PLVOL 338AS
PLVOL 339AS
PLVOL 3310AS
scale 1:1




PLVOL 33F
PLVOL 338FS
PLVOL 339FS
PLVOL 3310FS
scale 1:1



transition profiles

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



Adhesive version

1. Choose the suitable profile and cut it to the necessary length. 2. Degrease, wash and clean the solid surface thoroughly. 3. Remove the protective paper from the adhesive. 4. Lay the profile by applying pressure evenly over the whole surface without using a hammer.


Punched version

1. Choose the suitable profile and cut it to the necessary length. 2. Mark the position of the holes using the existing holes in the profile as reference. 3. Insert the screw anchors into the drilled holes. 4. Fix the profile using flathead screws suitable for the relative slots in the profile.


PROLEVALL 305

POLISHED STAINLESS STEEL 1.4016 AND
POLISHED BRASS WITH SELF-ADHESIVE AND PUNCHED

transition profiles

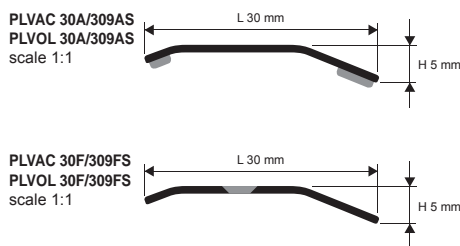

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

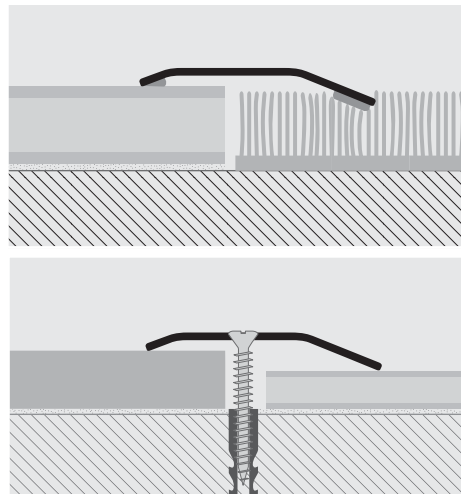

Adhesive version

1. Choose the suitable profile and cut it to the necessary length.
2. Degrease, wash and clean the solid surface thoroughly.
3. Remove the protective paper from the adhesive.
4. Lay the profile by applying pressure evenly over the whole surface without using a hammer.

Punched version


1. Choose the suitable profile and cut it to the necessary length.
2. Mark the position of the holes using the existing holes in the profile as reference.
3. Insert the screw anchors into the drilled holes.
4. Fix the profile using flathead screws suitable for the relative slots in the profile.

PROLEVALL 305 is a transition/terminal profile for floors of medium thickness (from 3 to 7 mm), used to join and compensate two floors of differing height, material and thickness. Ideal as a finishing terminal, it covers flaws and chipping or splintering of tiles, wood and carpeting. Available in stainless steel 1.4016 and polished brass. A protective film protects the finish of the 2.70 m long bars with either self-adhesive backing or punched for fixing with screws and anchors. The 93 cm blister pack version (self pack) is shrink-wrapped with bar code.



POLISHED STAINLESS STEEL 1.4016 with adhesive thermo packed
bar length 2,7 LM - pack. 40 Pcs - 108 LM


Article	H x L mm	€/LM	€/Pc
PLVAC 30A	5 X 30	5,47	14,77

POLISHED STAINLESS STEEL 1.4016 POLISHED with adhesive thermo packed - bar length 0,93 LM - pack. 20 Pcs 

Article	H x L mm	€/LM	€/Pc
PLVAC 309AS	5 X 30		6,70

POLISHED BRASS with adhesive thermo packed
bar length 2,7 LM - pack. 40 Pcs - 108 LM

Article	H x L mm	€/LM	€/Pc
PLVOL 30A	5 X 30	7,24	19,55


POLISHED BRASS with adhesive thermo packed
bar length 0,93 LM - pack. 20 Pcs 

Article	H x L mm	€/LM	€/Pc
PLVOL 309AS	5 X 30		7,70



POLISHED STAINLESS STEEL 1.4016 punched with protective film
bar length 2,7 LM - pack. 40 Pcs - 108 LM

Article	H x L mm	€/LM	€/Pc
PLVAC 30F	5 X 30	4,25	11,48

POLI. STAINLESS STEEL 1.4016 punched with screws and screw anchors thermo packed - bar length 0,93 LM - pack. 20 Pcs 

Article	H x L mm	€/LM	€/Pc
PLVAC 309FS	5 X 30		5,77

POLISHED BRASS punched with protective film
bar length 2,7 LM - pack. 40 Pcs - 108 LM

Article	H x L mm	€/LM	€/Pc
PLVOL 30F	5 X 30	5,86	15,82

POLI. BRASS punched with screws and screw anchors thermo packed
bar length 0,93 LM - pack. 20 Pcs 

Article	H x L mm	€/LM	€/Pc
PLVOL 309FS	5 X 30		6,55

COLOURS

(for a precise assessment of colours and finishes, see the relative enclosed sheet)



ON DEMAND HAND-BRUSHED STAINLESS STEEL
(prices and delivery time to be agreed)


SUITABLE FOR USE IN CONTACT WITH FOODSTUFFS

PROLEVALL 32 are transition profiles in anodised aluminium with silver-gold-bronze finish, available in the self-adhesive or punched versions. They are used to give a clean-cut, elegant finish when joining and compensating differences in level of floors that are already laid and in differing or same materials e.g. ceramic tiles-wood-parquet-marble, etc. They join and compensate a thickness between 7 and 9 mm. **PROLEVALL** ensures a perfect finish with little height, covering any flaws created during laying, while the contoured edges guarantee perfect adherence to the floor.


PROLEVALL 32

ANODISED gold, silver and bronze ALUMINIUM
SELF-ADHESIVE and PUNCHED

transition profiles



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

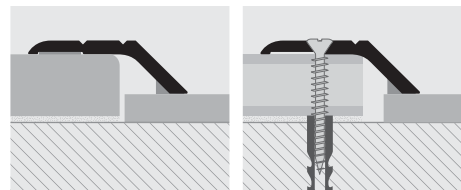

Adhesive version

1. Choose the suitable profile and cut it to the necessary length.
2. Degrease, wash and clean the solid surface thoroughly.
3. Remove the protective paper from the adhesive.
4. Lay the profile by applying pressure evenly over the whole surface without using a hammer.

Punched version

1. Choose the suitable profile and cut it to the necessary length.
2. Mark the position of the holes using the existing holes in the profile as reference.
3. Insert the screw anchors into the drilled holes.
4. Fix the profile using flathead screws suitable for the relative slots in the profile.



gold, silver and bronze ANODISED ALUMINIUM thermo packed
bar length 2,7 LM - pack. 40 Pcs - 108 LM

Article	L x H mm	€/LM	€/Pc
PLV... 32A (with adhesive)	32 x 8	6,47	17,47
PLV... 32F (punched)	32 x 8	4,31	11,64



gold, silver and bronze ANODISED ALUMINIUM thermo packed
bar length 0,93 LM - pack. 20 Pcs 

Article	L x H mm	€/LM	€/Pc
PLV... 329AS (with adhesive)	32 x 8		6,57
PLV... 329FS (punched)	32 x 8		4,98

Available in the finishes: AA - AO - AB (AT, CH and SB available upon request with a minimum quantity order of 540 LM). The code of the selected colour must be added to the article code. E.g.: PLV...32F (chosen finish Anod. Gold) PLVAO 32F.

COLOURS

(for a precise assessment of colours and finishes, see the relative enclosed sheet)



UPON REQUEST-MINIMUM QUANTITY 540 LM

PROLEVALL 358 are transition profiles in polished extruded brass, available in the self-adhesive or punched versions. They are used to give a clean-cut, elegant finish when joining and compensating differences in level of floors that are already laid and in differing or same materials e.g. ceramic tiles-wood-parquet-marble, etc. They join and compensate a thickness between 7 and 9 mm. **PROLEVALL** ensures a perfect finish with little height, covering any flaws created during laying, while the contoured edges guarantee perfect adherence to the floor.



POLISHED BRASS thermo packed
bar length 2,7 LM - pack. 20 Pcs - 54 LM (PLVOL 358F: 40,5 ML)

Article	L x H mm	€/LM	€/Pc
PLVOL 358A (with adhesive)	35 x 8	18,18	49,09
PLVOL 358F (punched)	35 x 8	16,89	45,60

POLISHED BRASS thermo packed
bar length 0,90 LM - pack. 20 Pcs

Article	L x H mm	€/LM	€/Pc
PLVOL 3589AS (with adhesive)	35 x 8		17,36
PLVOL 3589FS (punched)	35 x 8		16,23



COLOURS



OL - Polished brass

(for a precise assessment of colours and finishes, see the relative enclosed sheet)

PROLEVALL 4413 are transition profiles in polished extruded brass and anodised aluminium with silver and gold finish, available in the self-adhesive or punched versions. They are used to give a clean-cut, elegant finish when joining and compensating differences in level of floors that are already laid and in differing or same materials e.g. ceramic tiles-wood-parquet-marble, etc. They join and compensate a thickness between 13 and 15 mm. **PROLEVALL** ensures a perfect finish with little height, covering any flaws created during laying, while the contoured edges guarantee perfect adherence to the floor.



POLISHED BRASS thermo packed
bar length 2,7 LM - pack. 10 Pcs - 27 LM

Article	L x H mm	€/LM	€/Pc
PLVOL 4413A (with adhesive)	44 x 13	20,85	56,30
PLVOL 4413F (punched)	44 x 13	19,20	51,84

POLISHED BRASS thermo packed
bar length 0,90 LM - pack. 20 Pcs

Article	L x H mm	€/LM	€/Pc
PLVOL 44139AS (with adhesive)	44 x 13		19,51
PLVOL 44139FS (punched)	44 x 13		18,49




GOLD AND SILVER ANODISED ALUMINIUM thermo packed
bar length 2,7 LM - pack. 20 Pcs - 54 LM

Article	L x H mm	€/LM	€/Pc
PLV... 4413A (with adhesive)	44 x 13	8,11	21,90
PLV... 4413F (punched)	44 x 13	7,09	19,14

Available in the finishes: AA - AO (AT, CH and SB available upon request with a minimum quantity order of 540 LM). The code of the selected colour must be added to the article code. E.g.: PLV... 4413F (chosen finish Anod. Gold) PLVAO4413F.

COLOURS

(for a precise assessment of colours and finishes, see the relative enclosed sheet)




PROLEVALL 358

POLISHED BRASS
SELF-ADHESIVE and PUNCHED

PLVOL 358A/PLVOL 3589AS
PLVOL 358F/PLVOL 3589FS
scale 1:1



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

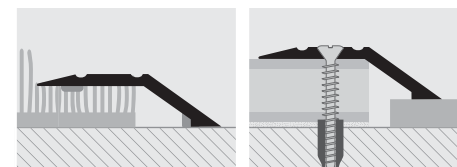

Adhesive version

1. Choose the suitable profile and cut it to the necessary length.
2. Degrease, wash and clean the solid surface thoroughly.
3. Remove the protective paper from the adhesive.
4. Lay the profile by applying pressure evenly over the whole surface without using a hammer.

Punched version

1. Choose the suitable profile and cut it to the necessary length.
2. Mark the position of the holes using the existing holes in the profile as reference.
3. Insert the screw anchors into the drilled holes.
4. Fix the profile using flathead screws suitable for the relative slots in the profile.


transition profiles

profiles
for floors

PROLEVALL 4413

Polished BRASS and ANODISED gold-silver ALUMINIUM
SELF-ADHESIVE and PUNCHED


PLVOL 4413A /PLVOL 44139AS
PLVOL 4413F /PLVOL 44139FS
scale 1:1

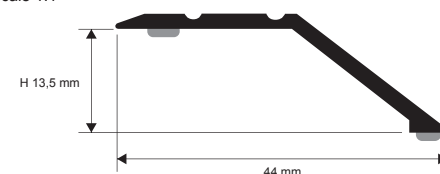

PLV... 4413A /PLV... 4413F
scale 1:1



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

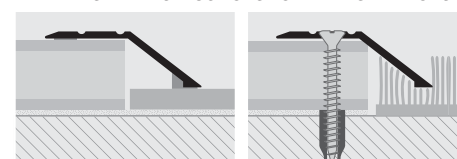

Adhesive version

1. Choose the suitable profile and cut it to the necessary length.
2. Degrease, wash and clean the solid surface thoroughly.
3. Remove the protective paper from the adhesive.
4. Lay the profile by applying pressure evenly over the whole surface without using a hammer.

Punched version

1. Choose the suitable profile and cut it to the necessary length.
2. Mark the position of the holes using the existing holes in the profile as reference.
3. Insert the screw anchors into the drilled holes.
4. Fix the profile using flathead screws suitable for the relative slots in the profile.


transition profiles

PRONIVO


GOLD AND ANODISED SILVER ALUMINIUM

transition profiles

PNV... 713A
scale 1:1



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

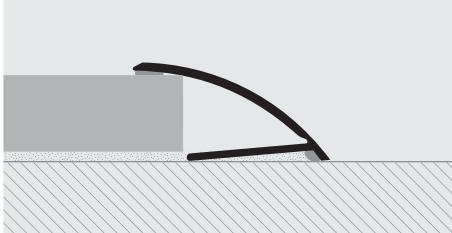

1. Choose the suitable profile and cut it to the necessary length. 2. Degrease, wash and clean the solid surface thoroughly. 3. Remove the protective paper from the adhesive. 4. Lay the profile by applying pressure evenly over the whole surface without using a hammer.

PRONIVO is a transition and edging profile with a rounded shape in anodised aluminium with tap-down edge. It is ideal to give a clean-cut, elegant finish when joining and compensating differences in level of floors that are already laid and in differing or same materials e.g. ceramic tiles-wood-parquet. With its rounded shape it compensates for differences in thickness between 7 and 13 mm where no profile was installed at the time of laying. **PRONIVO** ensures a perfect finish and is easy to lay with the self-adhesive backing guaranteeing perfect adherence to the floor.




ANODISED ALUMINIUM self-adhesive thermo packed
bar length 2,7 LM - pack. 30 Pcs - 81 LM

Article	H mm	€/LM	€/Pc
PNV... 713A	7/13	5,65	15,26

Available in the finishes: AO - AA. The code of the selected colour must be added to the article code.

E.g.: PNV... 713A (chosen finish Anod. Gold) PNVAO 713A.

COLOURS



AA - Anod. silver aluminium AO - Anod. Gold aluminium


(for a precise assessment of colours and finishes, see the relative enclosed sheet)

PROTRANS


GOLD AND ANODISED SILVER ALUMINIUM

transition profiles

PTS... 613A
PTS... 6139AS
scale 1:1



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

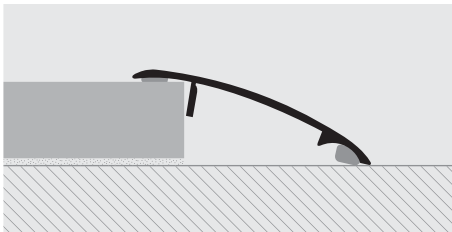

1. Choose the suitable profile and cut it to the necessary length. 2. Degrease, wash and clean the solid surface thoroughly. 3. Remove the protective paper from the adhesive. 4. Lay the profile by applying pressure evenly over the whole surface without using a hammer.

PROTRANS is a transition and edging profile with a rounded shape in anodised aluminium. It is ideal to give a clean-cut, elegant finish when joining and compensating differences in level of floors that are already laid and in differing or same materials e.g. ceramic tiles-wood-parquet. With its rounded shape it compensates for differences in thickness between 7 and 13 mm where no profile was installed at the time of laying. **PROTRANS** ensures a perfect finish and is easy to lay with the self-adhesive backing guaranteeing perfect adherence to the floor.



ANODISED ALUMINIUM self-adhesive thermo packed
bar length 2,7 LM - pack. 40 Pcs - 108 LM

Article	H mm	€/LM	€/Pc
PTS... 613A	6 / 13	5,39	14,55

Available in the finishes: AA - AO (AT, CH and SB available upon request with a minimum quantity order of 540 LM). The code of the selected colour must be added to the article code. E.g.: PTS... 613A (chosen finish Anod. Gold) PTSAO 613A.


ANODISED ALUMINIUM self-adhesive thermo packed
bar length 0,90 LM - pack. 20 Pcs

Article	H mm	€/Pc
PTS... 6139AS	6 / 13	5,70



COLOURS

(for a precise assessment of colours and finishes, see the relative enclosed sheet)

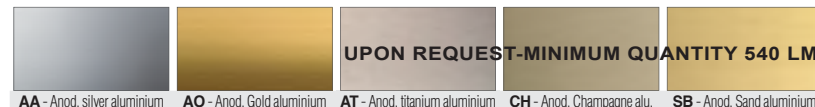

UPON REQUEST-MINIMUM QUANTITY 540 LM

AA - Anod. silver aluminium AO - Anod. Gold aluminium AT - Anod. titanium aluminium CH - Anod. Champagne alu. SB - Anod. Sand aluminium

PROFLOOR 712 is a self-adhesive sloping terminal transition profile in AISI 304/1.4301-V2A stainless steel with protective film. It is used to give a clean-cut, elegant finish when joining and compensating differences in level of floors that are already laid and in differing or same materials e.g. ceramic tiles-wood-parquet-marble. It joins and compensates a thickness between 7 and 12mm. **PROFLOOR 712** ensures a perfect finish with little height, covering any flaws created during laying of the floor. Easy to lay; the high-strength elastomer adhesive ensures an excellent grip.



POLISHED STAINLESS STEEL AISI 304/1.4301-V2A self-adhesive thermo packed - bar length 0,93 LM - pack. 20 Pcs 

Article	L x H mm	€/LM	€/Pc
PFRAC 7129AS	38 x 7/12	7,61	

POLISHED STAINLESS STEEL AISI 304/1.4301-V2A self-adhesive thermo packed - bar length 1,66 LM - pack. 20 Pcs 

Article	L x H mm	€/LM	€/Pc
PFRAC 71216AS	38 x 7/12	13,41	

SUITABLE FOR USE IN CONTACT WITH FOODSTUFFS.

PROFLOOR 712 is a self-adhesive sloping terminal transition profile in polished brass with protective film. It is used to give a clean-cut, elegant finish when joining and compensating differences in level of floors that are already laid and in differing or same materials e.g. ceramic tiles-wood-parquet-marble. It joins and compensates a thickness between 7 and 12mm. **PROFLOOR 712** ensures a perfect finish with little height, covering any flaws created during laying of the floor. Easy to lay; the high-strength elastomer adhesive ensures an excellent grip.



POLISHED BRASS self-adhesive thermo packed bar length 0,93 LM - pack. 20 Pcs 

Article	L x H mm	€/LM	€/Pc
PFROL 7129AS	38 x 7/12	9,76	

POLISHED BRASS self-adhesive thermo packed bar length 1,66 LM - pack. 20 Pcs 

Article	L x H mm	€/LM	€/Pc
PFROL 71216AS	38 x 7/12	17,25	

PROFLOOR 712 is a self-adhesive sloping terminal transition profile in anodised aluminium with silver-gold-bronze finish with protective film. It is used to give a clean-cut, elegant finish when joining and compensating differences in level of floors that are already laid and in differing or same materials e.g. ceramic tiles-wood-parquet-marble. It joins and compensates a thickness between 7 and 12mm. **PROFLOOR 712** ensures a perfect finish with little height, covering any flaws created during laying of the floor. Easy to lay; the high-strength elastomer adhesive ensures an excellent grip.



ANODISED ALUMINIUM self-adhesive thermo packed bar length 2,7 LM - pack. 40 Pcs - 108 LM

Article	L x H mm	€/LM	€/Pc
PFRA... 712A	38 x 7/12	5,44	14,69

Available in the finishes: AA - AO - AB (AT, CH and SB available upon request with a minimum quantity order of 540 LM). The code of the selected colour must be added to the article code. E.g.: PFR... 712A (finish: Anod. Gold) PFRAO 712A.

Prices are referred to whole packs. 10% increase for minimum orders of 10 pcs. 20% increase for orders of less than 10 pcs.

POLISHED STAINLESS STEEL AISI 304/1.4301-V2A self-adhesive thermo packed - bar length 2,7 LM - pack. 20 Pcs - 54 LM

Article	L x H mm	€/LM	€/Pc
PFRAC 712A	38 x 7/12	7,21	19,47

POLISHED STAINLESS STEEL AISI 304/1.4301-V2A self-adhesive thermo packed - bar length 0,83 LM - pack. 20 Pcs 

Article	L x H mm	€/LM	€/Pc
PFRAC 7128AS	38 x 7/12	6,86	

POLISHED STAINLESS STEEL AISI 304/1.4301-V2A self-adhesive thermo packed - bar length 1,03 LM - pack. 20 Pcs 

Article	L x H mm	€/LM	€/Pc
PFRAC 71210AS	38 x 7/12	8,37	

COLOURS




AC - Polished stainless steel AISI 304/1.4301-V2A

On demand hand-brushed stainless steel (Prices and delivery time to be agreed)


PROFLOOR 712

POLISHED STAINLESS STEEL AISI 304/1.4301-V2A WITH SELF-ADHESIVE

PFRAC 712A/7128AS/7129AS/71210AS/71216AS scale 1:1

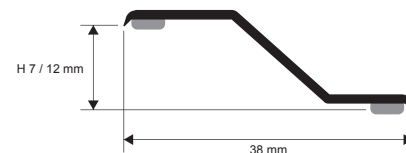

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

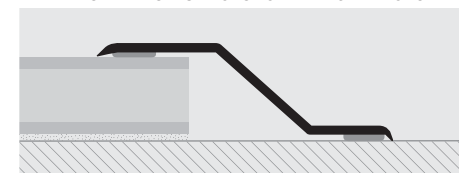

1. Choose the suitable profile and cut it to the necessary length.
2. Degrease, wash and clean the solid surface thoroughly.
3. Remove the protective paper from the adhesive.
4. Lay the profile by applying pressure evenly over the whole surface without using a hammer.


transition profiles

profiles for floors


PROFLOOR 712

POLISHED BRASS WITH SELF-ADHESIVE

PFROL 712A/7128AS/7129AS/71210AS/71216AS scale 1:1

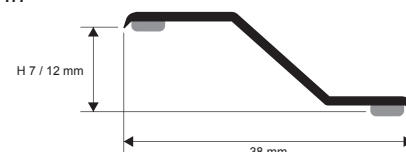

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

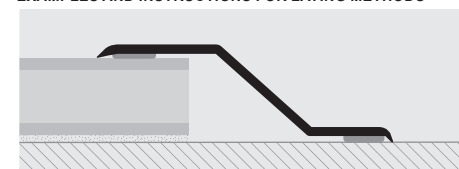

1. Choose the suitable profile and cut it to the necessary length.
2. Degrease, wash and clean the solid surface thoroughly.
3. Remove the protective paper from the adhesive.
4. Lay the profile by applying pressure evenly over the whole surface without using a hammer.

transition profiles

PROFLOOR 712

GOLD, SILVER AND BRONZE ANOD. ALUMINIUM WITH SELF-ADHESIVE

PFRA... 712/7129S scale 1:1



COLOURS



Anod. Titanium Alu., Champagne And Sand Available Upon Request (With A Minimum Quantity Order Of 540 Lm)

transition profiles

PROGRESS 712

POLISHED STAINLESS STEEL AISI 304/1.4301
AND POLISHED BRASS WITH SELF-ADHESIVE


profiles
for floors

PRSAC 712A/7129AS
PRSOL 712A/7129AS
scale 1:1

H 7 / 12 mm



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

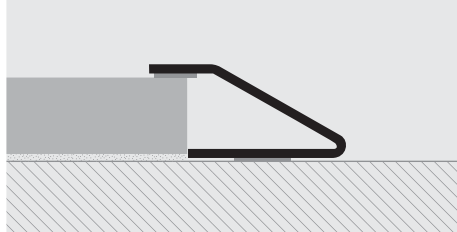

1. Choose the suitable profile and cut it to the necessary length. 2. Degrease, wash and clean the solid surface thoroughly. 3. Remove the protective paper from the adhesive. 4. Lay the profile by applying pressure evenly over the whole surface without using a hammer.

PROPRESS 712 is a self-adhesive sloping terminal transition profile in stainless steel 1.4301 and polished brass with protective film. It is used to give a clean-cut, elegant finish when joining and compensating differences in level of floors that are already laid and in differing or same materials e.g. ceramic tiles-wood-parquet-marble, etc. It joins and compensates a thickness between 7 and 12mm. **PROPRESS 712** ensures a perfect finish with little height, covering any flaws created during laying of the floor. Easy to lay; the high-strength elastomer adhesive ensures an excellent grip.



POLISHED STAINLESS STEEL 1.4301 self-adhesive thermo packed
bar length 2,7 LM - pack. 20 Pcs - 54 LM

Article	L x H mm	€/LM	€/Pc
PRSAC 712A	27 x 7/12	9,55	25,79



POLISHED BRASS self-adhesive thermo packed
bar length 2,7 LM - pack. 20 Pcs - 54 LM

Article	L x H mm	€/LM	€/Pc
PRSOL 712A	27 x 7/12	11,25	30,38

POLISHED STAINLESS STEEL 1.4301 self-adhesive thermo packed
bar length 0,90 LM - pack. 20 Pcs

Article	L x H mm	€/Pc
PRSAC 7129AS	27 x 7/12	10,48

POLISHED BRASS self-adhesive thermo packed
bar length 0,90 LM - pack. 20 Pcs


Article	L x H mm	€/Pc
PRSOL 7129AS	27 x 7/12	11,50

COLOURS

(for a precise assessment of colours and finishes, see the relative enclosed sheet)



AC - Polished stainless steel
304/1.4301



OL - Polished brass

SUITABLE FOR USE IN CONTACT WITH FOODSTUFFS.

On demand hand-brushed stainless steel (prices and delivery time to be agreed)

PROFLOOR 1216


STAINLESS STEEL AISI 304/1.4301 POLISHED
AND POLISHED BRASS WITH SELF-ADHESIVE

transition profiles


PFRAC 1216A/12169AS
PFROL 1216A/12169AS
scale 1:1

H 12 / 16 mm

48 mm

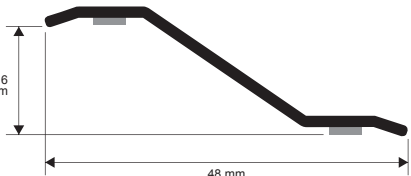

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

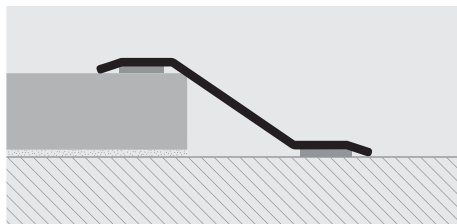

1. Choose the suitable profile and cut it to the necessary length. 2. Degrease, wash and clean the solid surface thoroughly. 3. Remove the protective paper from the adhesive. 4. Lay the profile by applying pressure evenly over the whole surface without using a hammer.



POLISHED STAINLESS STEEL AISI 304/1.4301 self-adhesive thermo packed - bar length 2,7 LM - pack. 20 Pcs - 54 LM

Article	L x H mm	€/LM	€/Pc
PFRAC 1216A	48 x 12/16	11,03	29,78

POLISHED STAINLESS STEEL AISI 304/1.4301 self-adhesive thermo packed - bar length 0,93 LM - pack. 20 Pcs

Article	L x H mm	€/Pc
PFRAC 12169AS	48 x 12/16	10,82



POLISHED BRASS self-adhesive thermo packed
bar length 2,7 LM - pack. 20 Pcs - 54 LM

Article	L x H mm	€/LM	€/Pc
PFROL 1216A	48 x 12/16	14,48	39,10

POLISHED BRASS self-adhesive thermo packed
bar length 0,93 LM - pack. 20 Pcs

Article	L x H mm	€/Pc
PFROL 12169AS	48 x 12/16	14,54

COLOURS

(for a precise assessment of colours and finishes, see the relative enclosed sheet)



AC - Polished stainless steel
AISI 304/1.4301-V2A



OL - Polished brass

SUITABLE FOR USE IN CONTACT WITH FOODSTUFFS.

On demand hand-brushed stainless steel (prices and delivery time to be agreed)

PROLINOLEUM is a self-adhesive transition profile in anodised aluminium with gold/silver finish. It is used to give a clean-cut, elegant finish to hardwearing surfaces in PVC or linoleum and other thin materials between 2-3 mm thick. **PROLINOLEUM** ensures a perfect finish with little height, covering any flaws created during laying of the floor. Easy to lay; the high-strength elastomer adhesive ensures an excellent grip.



ANODISED GOLD AND SILVER ALUMINIUM thermo packed
bar length 2,7 LM - pack. 40 Pcs - 108 LM

Article	H x L mm	€/LM	€/Pc
PLU ... 16 (without adhesive)	2,5 x 16	3,29	8,88
PLU ... 16A (with adhesive)	2,5 x 16	4,16	11,23

Available in the finishes: AO - AA (AT, CH and SB available upon request with a minimum quantity order of 540 LM). The code of the selected colour must be added to the article code.
E.g.: PLU ... 16 (chosen finish Anod. Gold) PLUAO 16.

COLOURS (for a precise assessment of colours and finishes, see the relative enclosed sheet)

AA - Anod. silver aluminium	AO - Anod. Gold aluminium	AT - Anod. titanium aluminium	CH - Anod. Champagne alu.	SB - Anod. Sand aluminium

UPON REQUEST-MINIMUM QUANTITY 540 LM

PROFLOOR 24 is a self-adhesive transition profile with chamfered edges in stainless steel 1.4016 and polished brass with protective film. It is used to give a clean-cut, elegant finish to hardwearing surfaces in PVC and linoleum - carpeting and other thin materials between 2 and 5mm thick. **PROFLOOR** ensures a perfect finish with little height, covering any flaws created during laying of the floor. Easy to lay; the high-strength elastomer adhesive ensures an excellent grip.



POLISHED STAINLESS STEEL 304/1.4301 self-adhesive thermo packed - bar length 2,7 LM - pack. 40 Pcs - 108 LM

Article	H x L mm	€/LM	€/Pc
PFRAC 24A	2/4,5 x 30	5,47	14,77

POLISHED STAINLESS STEEL 304/1.4301 self-adhesive thermo packed - bar length 0,93 LM - pack. 20 Pcs

Article	H x L mm	€/Pc
PFRAC 249AS	2/4,5 x 30	6,02

POLISHED BRASS self-adhesive thermo packed
bar length 2,7 LM - pack. 40 Pcs - 108 LM

Article	H x L mm	€/LM	€/Pc
PFROL 24A	2/4,5 x 30	7,24	19,55

POLISHED BRASS self-adhesive thermo packed
bar length 0,93 LM - pack. 20 Pcs

Article	H x L mm	€/Pc
PFROL 249AS	2/4,5 x 30	7,70

COLOURS (for a precise assessment of colours and finishes, see the relative enclosed sheet)

AC - Polished stainless steel 1.4301	OL - Polished brass

On demand hand-brushed stainless steel (prices and delivery time to be agreed)

SUITABLE FOR USE IN CONTACT WITH FOODSTUFFS.

Prices are referred to whole packs. 10% increase for minimum orders of 10 pcs. 20% increase for orders of less than 10 pcs.


PROLINOLEUM

ANODISED GOLD AND SILVER ALUMINIUM
WITH AND WITHOUT ADHESIVE

PLU ... 16
PLU ... 16A
scale 1:2



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

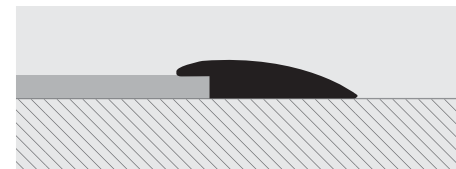

1. Choose the suitable profile and cut it to the necessary length. 2. Degrease, wash and clean the solid surface thoroughly. 3. Remove the protective paper from the adhesive. 4. Lay the profile by applying pressure evenly over the whole surface without using a hammer.


profiles for low thicknesses

profiles for floors


PROFLOOR 24

STAINLESS STEEL AISI 304/1.4301
AND POLISHED BRASS WITH SELF-ADHESIVE

PFRAC 24A/249A
PFROL 24A/249A
scale 1:2



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

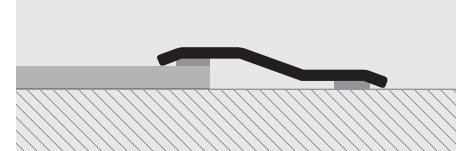


1. Choose the suitable profile and cut it to the necessary length. 2. Degrease, wash and clean the solid surface thoroughly. 3. Remove the protective paper from the adhesive. 4. Lay the profile by applying pressure evenly over the whole surface without using a hammer.

profiles for low thicknesses


PROSLIDER KL ALL

ANODISED SILVER ALUMINIUM

profiles for low thicknesses

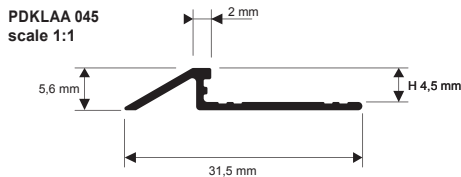

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



1. Choose the profile with the required finish. 2. Fill the profile cavity with adhesive and apply the adhesive onto the area of application. 3. Lay the PROSLIDER KL ALL. 4. Align it flush with the floor/covering. 5. Use the adhesive to seal any empty interstices.

PROSLIDER KL ALL is a slide shape progressive transition terminal square suitable for connecting perfectly without steps two floor levels. The particular strength of the square allows to resist and bear heavy loads and frequent passages of manual trolleys and motor vehicles besides protecting the edge of the higher floor. The **PROSLIDER KL** is especially used to connect LA Kerlite/Laminam and thin ceramic tiles to each other or else it is used with wood and/or a pre-existing floor. Available in anodised aluminium.

ANODISED SILVER ALUMINIUM thermo packed
bar length 2,7 LM - pack. 40 Pcs - 108 LM

Article	H mm	€/LM	€/Pcs
PDKLAA 045	4,5	4,98	13,45

COLOURS



AA - Anod. silver aluminium

(for a precise assessment of colours and finishes, see the relative enclosed sheet)




PROCOVER 1045 ALL

ANODISED AND POLISHED SILVER, CHROME AND GOLD ALUMINIUM

profiles for low thicknesses



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

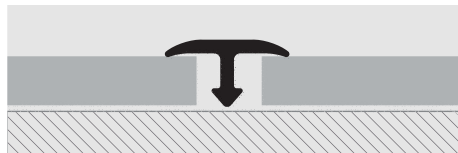

1. Choose PROCOVER 1045 ALL in the desired finish considering a side lap of 2/3 mm. 2. Fill the gap with single-pack silicone or with the adhesive used for laying the floor. 3. Bury the profile into the adhesive, making sure that both side laps of the profile rest on the coverings to be joined.

IMPORTANT: Take care of the external edges of the aluminium PROCOVER 1045 ALL. They must be protected from aggressive substances such as adhesives and sealants and from smoothing or scraping action.

PROCOVER 1045 ALL is a joint cover profile in anodised aluminium. It is applied at the end of the laying process between two adjoining floors placed at the same level, with a gap of 3 to 6 mm between the two kerlite /laminam/ or thin ceramic tile floors laid with the adhesive. It protects the external edge of the floor/covering. It is easy to lay and aesthetically pleasing. The design of the profile with lower vertical arrowhead part allows excellent anchorage with silicone / adhesive.

ANODISED SILVER ALUMINIUM thermo packed
bar length 2,7 LM - pack. 40 Pcs - 108 LM


Article	H mm	€/LM	€/Pcs
PCRAA 1045	4,5	2,72	7,34

POLISHED CHROME/GOLD ALUMINIUM thermo packed
bar length 2,7 LM - pack. 40 Pcs - 108 LM

Article	H mm	€/LM	€/Pcs
PCRB 1045	4,5	4,67	12,61
PCRB 1045	4,5	4,67	12,61

COLOURS

(for a precise assessment of colours and finishes, see the relative enclosed sheet)



AA - Anod. silver aluminium



BC - Polished chrome alu.



BO - Polished gold alu.






PROCOVER


POLISHED AND SATINED
STAINLESS STEEL AISI 304/1.4301-V2A

threshold - joint-cover profiles


PCRAC 149/1499
PCRACS 149/1499
scale 1:1



PCRAC 269
PCRACS 269
scale 1:1

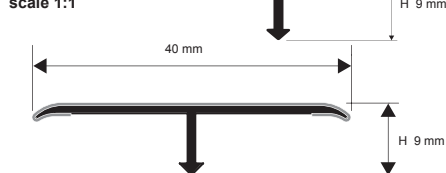

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

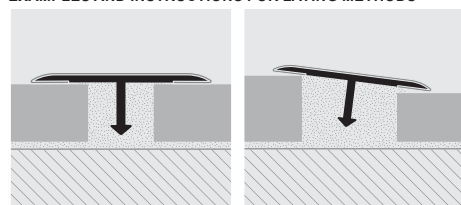

1. Choose the PROCOVER with the width suitable for the gap between the two floors to be joined, taking into consideration 2/3 mm side lap.
2. Fill the gap with single-pack silicone or with the adhesive used for laying the floor.
3. Bury the profile into the adhesive, making sure that both side laps of the profile rest on the coverings to be joined.

PROCOVER é is a joint-cover profile in stainless steel (polished or satin finish) with aluminium supports. It is applied at the end of laying two adjoining floors with the same height, having left a 6 - 24 mm gap between the two floors set in a thin bed of adhesive. It protects the outside edges of the floor/covering. It is easy to lay and attractive. The design of the profile with lower vertical arrowhead part allows excellent anchorage with the silicone/adhesive.

The aluminium structure with the stainless steel lining provides it with a high level of resistance to cuts and deformation.



POLI. STAINLESS STEEL AISI 304/1.4301

with protective film - bar length 2,7 LM

(PCRAC 1499 bar length 0,90 LM - pack. 20 Pcs)

Article	L x H mm	€/LM	€/Pc
PCRAC 149 (pack. 108 ML)	14 x 9	8,73	23,57
PCRAC 1499 (pack. 20 Pcs)	14 x 9		8,83
PCRAC 209	20 x 9	11,36	30,67
PCRAC 269 (pack. 81 ML)	26 x 9	12,48	33,70



SATINED STAINLESS STEEL AISI 304/1.4301-V2A

with protective film - bar length 2,7 LM


(PCRACS 1499 bar length 0,90 LM - pack. 20 Pcs)

Article	L x H mm	€/LM	€/Pc
PCRACS 149 (pack. 108 ML)	14 x 9	11,03	29,78
PCRACS 1499 (pack. 20 Pcs)	14 x 9		10,83
PCRACS 209	20 x 9	12,53	33,83
PCRACS 269 (pack. 81 ML)	26 x 9	15,69	42,36



COLOURS

(for a precise assessment of colours and finishes, see the relative enclosed sheet)



SUITABLE FOR USE IN CONTACT WITH FOODSTUFFS.

PROCOVER

POLISHED AND CHROMED BRASS

threshold - joint-cover profiles

PCR... 149/1499
scale 1:1




PCR... 209
scale 1:1



PCR... 269
scale 1:1



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

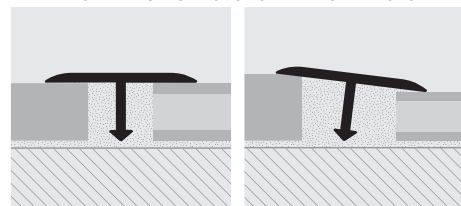

1. Choose the PROCOVER with the width suitable for the gap between the two floors to be joined, taking into consideration 2/3 mm side lap.
2. Fill the gap with single-pack silicone or with the adhesive used for laying the floor.
3. Bury the profile into the adhesive, making sure that both side laps of the profile rest on the coverings to be joined.

Profiles in natural or polished brass may be subject to oxidation in environments with high degrees of humidity. Resulting marks may be easily removed by polishing the profiles with specific products to be found on sale such as Sidol, Smac and similar.



POLISHED BRASS thermo packed - bar length 2,7 LM

(PCROL 1499 bar length 0,90 LM - pack. 40 Pcs)

Article	L x H mm	€/LM	€/Pc
PCROL 149 (pack. 108 LM)	14 x 9	5,76	15,55
PCROL 1499 (pack. 40 Pcs)	14 x 9		6,16
PCROL 209 (pack. 81 LM)	20 x 9	8,67	23,41
PCROL 269 (pack. 54 LM)	26 x 9	10,48	28,30



CHROMED BRASS (polished stainless steel effect) thermo

packed - bar length 2,7 LM - pack. 20 Pcs - 54 LM


Article	L x H mm	€/LM	€/Pc
PCROC 149 (pack. 108 LM)	14 x 9	11,52	31,10
PCROC 209 (pack. 81 LM)	20 x 9	13,44	36,29
PCROC 269 (pack. 54 LM)	26 x 9	15,92	42,98

ANTIQUE BRASS thermo packed

bar length 2,7 LM - pack. 20 Pcs - 54 LM

Article	L x H mm	€/LM	€/Pc
PCROB 149 (pack. 108 LM)	14 x 9	24,00	64,80
PCROB 209 (pack. 81 LM)	20 x 9	26,00	70,20
PCROB 269 (pack. 54 LM)	26 x 9	29,00	78,30

COLOURS



(for a precise assessment of colours and finishes, see the relative enclosed sheet)

PROCOVER is a joint-cover profile in anodised aluminium. It is applied at the end of laying two adjoining floors with the same height, having left a 6 - 24 mm gap between the two floors set in a thin bed of adhesive. It protects the outside edges of the floor/covering. It is easy to lay and attractive. The design of the profile with lower vertical arrowhead part allows excellent anchorage with the silicone/adhesive.

PROCOVER

ANODISED SILVER, GOLD ALUMINIUM




ANODISED SILVER, GOLD ALUMINIUM

thermo packed - bar length 2,7 LM

(PCRAA 1499 bar length 0,90 LM - pack. 40 Pcs  **ECO BLISTER**)

Article	L x H mm	€/LM	€/Pc
PCRAA 149 (pack. 40 Pcs)	14 x 9	3,13	8,45
PCRAO 149 (pack. 40 Pcs)	14 x 9	3,22	8,69
PCRAA 1499 (pack. 40 Pcs)	14 x 9		3,70
PCRAA 209 (pack. 40 Pcs)	20 x 9	3,34	9,02
PCRAA 269 (pack. 40 Pcs)	26 x 9	4,16	11,23
PCRAO 269 (pack. 40 Pcs)	26 x 9	4,28	11,56
PCRAA 409 (pack. 20 Pcs)	40 x 9	6,11	16,50

COLOURS




(for a precise assessment of colours and finishes, see the relative enclosed sheet)

Available in the finishes: AA - AO. PCRAT 149 and PCRAB 269 are available on request (minimum purchase quantity: 540 lm - Price: add a +20% to the price of PCRAA 149 and PCRAA 269)



AT - Anod. titanium aluminium AB - Anod. Bronze aluminium

PCR... 149/1499
scale 1:1




PCR... 209
scale 1:1



PCR... 269
PCRAA 409
scale 1:1



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

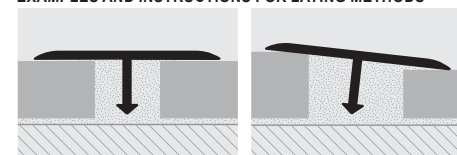

1. Choose the PROCOVER with the width suitable for the gap between the two floors to be joined, taking into consideration 2/3 mm side lap.
2. Fill the gap with single-pack silicone or with the adhesive used for laying the floor. 3. Bury the profile into the adhesive, making sure that both side laps of the profile rest on the coverings to be joined.

threshold - joint-cover profiles

profiles
for floors

PROCOVER WOOD is a joint-cover profile in aluminium covered with a very strong film available in 10 wood finishes. It is applied at the end of laying two adjoining floors with the same height, having left a 6 - 24 mm gap between the two floors set in a thin bed of adhesive. It protects the outside edges of the floor/covering. It is easy to lay and attractive. The design of the profile with lower vertical arrowhead part allows excellent anchorage with the silicone/adhesive.

ALUMINIUM 10 WOOD FINISHES thermo packed

bar length 2,7 LM - pack. 40 Pcs - 108 LM (L 26mm - 54 LM)


Article	L x H mm	€/LM	€/Pc
PCRA... 149	14 x 9	6,06	16,36
PCRA... 269	26 x 9	10,89	29,40

Available in the wood finishes: 04W - 05W - 07W - 08W - 09W - 10W - 11W - 28W - 29W - 30W.

The code of the selected colour must be added to the article code. E.g.: PCRA... 149 (chosen finish Dark beech) PCRA04W 149.

COLOURS

(for a precise assessment of colours and finishes, see the relative enclosed sheet)

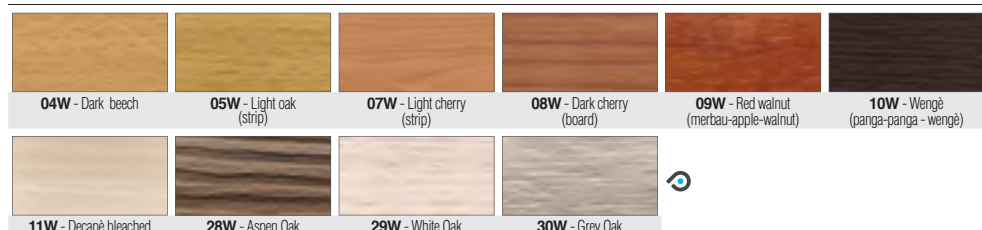

 = News 2015

PROCOVER WOOD

ALUMINIUM COVERED WITH PROTECTIVE FILM IN 10 WOOD FINISHES


PCRA... 149
scale 1:1



PCRA... 269
scale 1:1



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

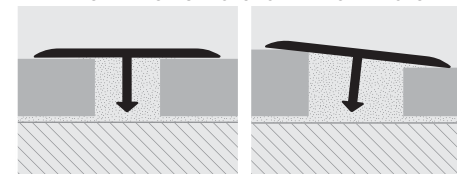

1. Choose the PROCOVER with the width suitable for the gap between the two floors to be joined, taking into consideration 2/3 mm side lap.
2. Fill the gap with single-pack silicone or with the adhesive used for laying the floor. 3. Bury the profile into the adhesive, making sure that both side laps of the profile rest on the coverings to be joined.

threshold - joint-cover profiles

PROCOVER INSERT for inserting Procover profiles

VINYL RESIN / BLACK RUBBER

Vinyl resin/rubber profile "U-form" for inserting PROCOVER with PINBFT 45 or PINBFT 40 Proinsert System base.


VINYL RESIN/RUBBER

length 2,7 LM and/or in rolls 100 LM


Article	€/LM	€/roll
PCPCR 2,7ML	3,07	8,29
PCPCR 100ML	3,07	307,00

PROINSERT BASE 45 and BASE 40 - ALU. PUNCHED - PERFORED - bar length 2,7 LM - pack. 20 Pcs - 54 LM

Article	Width. mm	€/LM	€/Pc
PINBFT 45	45	4,88	13,18
PINBFT 40	40	4,82	13,01

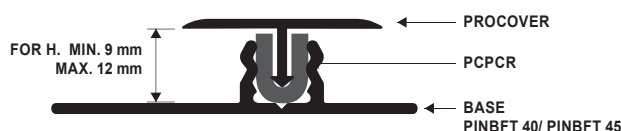

INSERT
+BASE 45/40
scale 1:1

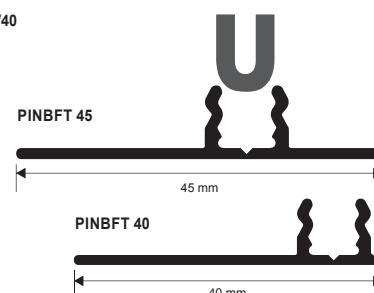


91


Prices are referred to whole packs. 10% increase for minimum orders of 10 pcs. 20% increase for orders of less than 10 pcs.

PROPLATE

POLISHED STAINLESS 1.4016 STEEL
SELF ADHESIVE OR PUNCHED

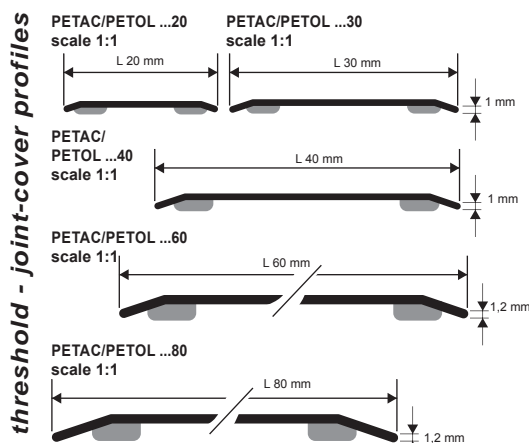

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

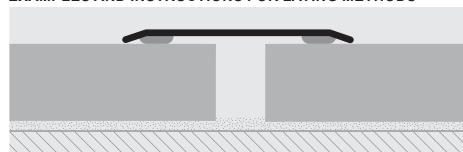

1. Choose PROPLATE in the required width and material and whether punched or with self-adhesive backing. 2. Cut the profile to the required length. When laying the self-adhesive Proplate, clean, degrease and dry the surface, checking that the temperature for application is at least 15°.
3. Remove the protective paper from the adhesive and lay the profile correctly applying a uniform vertical pressure by hand without moving the profile and without using iron/steel hammers. 4. When laying the punched version, align the profile and mark the position of the holes using the holes in the profile as reference. 5. Insert suitable screw anchors (usually Ø 3mm screws & 5x25mm screw anchors) 6. Align the profile and tighten the galvanised or brassed flathead screws.

PROPLATE is a flat joint-cover profile with special profiled edges for perfect adherence to flooring. Made in stainless steel 1.4016 with a protective film and available with or without adhesive or for certain widths also in the punched version. Available in widths of 20 - 30 - 40 - 40 - 80 mm with protective film.



POLISHED STAINLESS 1.4016 STEEL thermo packed
bar length 2,70 LM - pack. 20 Pcs - 54 LM (W 20 - 30 mm - 108 LM)

Article	Width - Thick.	€/LM	€/Pc
PETAC 20A (with adhesive)	20mm - 10/10	5,10	13,77
PETAC 30A (with adhesive)	30mm - 10/10	5,47	14,77
PETAC 40A (with adhesive)	40mm - 12/10	7,89	21,30
PETAC 60A (with adhesive)	60mm - 12/10	13,79	37,23
PETAC 80A (with adhesive)	80mm - 12/10	17,42	47,03

POLISHED STAINLESS 1.4016 STEEL thermo packed
bar length 2,70 LM - pack. 20 Pcs - 54 LM

Article	Width - Thick.	€/LM	€/Pc
PETAC 60 (without holes)	60mm - 12/10	12,11	32,70
PETAC 80 (without holes)	80mm - 12/10	15,72	42,44

PUNCHED STAINLESS 1.4016 STEEL with protective film
bar length 2,70 LM - pack. 20 Pcs - 54 LM (W 30 mm - 108 LM)


Article	Width - Thick.	€/LM	€/Pc
PETAC 30F (punched)	30mm - 10/10	4,25	11,48
PETAC 40F (punched)	40mm - 12/10	6,67	18,01



POLISHED STAINLESS 1.4016 STEEL thermo packed
bar length 0,93 LM - pack. 20 Pcs

Article	Width - Thick.	€/Pc
PETAC 309AS (with adhesive)	30mm - 10/10	5,49
PETAC 309FS (punched with screws)	30mm - 10/10	4,67
PETAC 609AS (with adhesive)	60mm - 12/10	13,63
PETAC 809AS (with adhesive)	80mm - 12/10	17,52

COLOURS



(for a precise assessment of colours and finishes, see the relative enclosed sheet)


SUITABLE FOR USE IN CONTACT WITH FOODSTUFFS.

PROPLATE is a flat joint-cover profile with special profiled edges for perfect adherence to flooring. Made in polished brass with a protective film and available with or without adhesive or for certain widths also in the punched version. Available in widths of 20 - 30 - 40 - 40 - 80 mm with protective film.

PROPLATE

POLISHED BRASS
SELF ADHESIVE OR PUNCHED

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

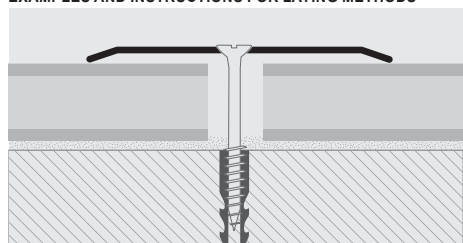

1. Choose PROPLATE in the required width and material and whether punched or with self-adhesive backing. 2. Cut the profile to the required length. When laying the self-adhesive Proplate, clean, degrease and dry the surface, checking that the temperature for application is at least 15°.
3. Remove the protective paper from the adhesive and lay the profile correctly applying a uniform vertical pressure by hand without moving the profile and without using iron/steel hammers. 4. When laying the punched version, align the profile and mark the position of the holes using the holes in the profile as reference. 5. Insert suitable screw anchors (usually Ø 3mm screws & 5x25mm screw anchors) 6. Align the profile and tighten the galvanised or brassed flathead screws.



POLISHED BRASS thermo packed
bar length 2,70 LM - pack. 20 Pcs - 54 LM (W 20 - 30 mm - 108 LM)

Article	Width - Thick.	€/LM	€/Pc
PETOL 20A (with adhesive)	20mm - 10/10	6,76	18,25
PETOL 30A (with adhesive)	30mm - 10/10	6,94	18,74
PETOL 40A (with adhesive)	40mm - 10/10	8,77	23,68
PETOL 60A (with adhesive)	60mm - 13/10	23,11	62,40
PETOL 80A (with adhesive)	80mm - 13/10	29,27	79,03

POLISHED BRASS thermo packed
bar length 2,70 LM - pack. 20 Pcs - 54 LM (W 20 mm - 108 LM)

Article	Width - Thick.	€/LM	€/Pc
PETOL 20 (without holes)	20mm - 10/10	5,46	14,74
PETOL 60 (without holes)	60mm - 13/10	21,10	56,97
PETOL 80 (without holes)	80mm - 13/10	27,22	73,49

POLISHED BRASS thermo packed
bar length 2,70 LM - pack. 20 Pcs - 54 LM (W 30 mm - 108 LM)

Article	Width - Thick.	€/LM	€/Pc
PETOL 30F (punched)	30mm - 10/10	5,65	15,26
PETOL 40F (punched)	40mm - 10/10	7,48	20,20

POLISHED BRASS thermo packed
bar length 0,83 LM - pack. 20 Pcs

Article	Width - Thick.	€/Pc
PETOL 308AS (with adhesive)	30mm - 10/10	6,65
PETOL 408AS (with adhesive)	40mm - 10/10	8,17

POLISHED BRASS thermo packed
bar length 0,93 LM - pack. 20 Pcs

Article	Width - Thick.	€/Pc
PETOL 309AS (with adhesive)	30mm - 10/10	7,40
PETOL 309FS (punched with screws)	30mm - 10/10	6,43
PETOL 409AS (with adhesive)	40mm - 10/10	9,50
PETOL 409FS (punched with screws)	40mm - 13/10	8,42
PETOL 609AS (with adhesive)	60mm - 13/10	21,05
PETOL 809AS (with adhesive)	80mm - 13/10	26,75


POLISHED BRASS thermo packed
bar length 1,03 LM - pack. 20 Pcs

Article	Width - Thick.	€/Pc
PETOL 3010AS (with adhesive)	30mm - 10/10	8,42
PETOL 4010AS (with adhesive)	40mm - 10/10	10,22
PETOL 4010FS (punched with screws)	40mm - 13/10	9,35

POLISHED BRASS thermo packed
bar length 1,66 LM - pack. 20 Pcs

Article	Width - Thick.	€/Pc
PETOL 3016AS (with adhesive)	30mm - 10/10	13,30
PETOL 4016AS (with adhesive)	40mm - 10/10	16,87

COLOURS



(for a precise assessment of colours and finishes, see the relative enclosed sheet)

PROPLATE 80 ALZ is a new aluminium joint cover, threshold cover. It is very resistant and suitable for covering the expanding joint of two different supporting structures, or to connect a floor with an adjoining one of the same or different kind. Particularly used in Industrial field, in the malls, sport facilities and gyms equipped with wood and/or resin floors.



ANODISED SILVER ALUMINIUM thermo packed
bar length 2,7 LM - pack. 20 Pcs - 54 LM (PETAA 80Z - 40,5 ML)

Article	Width mm	€/LM	€/Pc
PETAA 80ZA (with adhesive)	80	14,89	40,20
PETAA 80Z (without adhesive)	80	13,86	37,42

PERFORATED VERSION AVAILABLE ON DEMAND.

COLOURS

(for a precise assessment of colours and finishes, see the relative enclosed sheet)



PROCOVER 14PT is a small aluminium joint cover /threshold cover square. It is used to finish technically floors laid at the same level in ceramic tiles/ ceramics ceramics / wood. It covers eventual laying flaws and guarantees that the floors which are underneath expand enough. In Gold-Silk anodised Aluminium and Bronze with sticker.



ANODISED ALUMINIUM WITH ADHESIVE thermo packed
bar length 2,7 LM - pack. 40 Pcs - 108 LM

Article	Width mm	€/LM	€/Pc
PCRAA 14PTA	14	3,90	10,53
PCRAO 14PTA	14	3,90	10,53
PCRAB 14PTA	14	3,90	10,53

COLOURS


(for a precise assessment of colours and finishes, see the relative enclosed sheet)




PROPLATE 80 ALZ

KNURLED ANODISED SILVER ALUMINIUM

PETAA 80ZA
PETAA 80Z



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

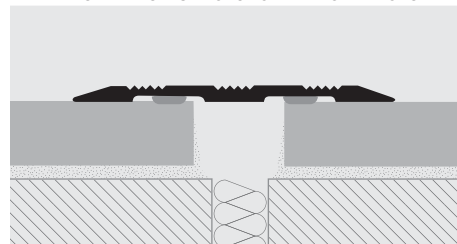


1. Choose PROPLATE 80ALZ model with or without sticker and cut it to the required length. 2. Degrease, wash and clean accurately the solid floor. 3a. Remove the protective label from the sticker (sticker model). 4a. Rest the square pressing evenly without hammering. 3b. Perforate on one side and insert the nogs in the holes. 4b. Fix and screw the square equipped with flared head screws suitable to the holes made.


PROCOVER 14PT

ANODISED GOLD, SILVER AND BRONZE ALUMINIUM

PCRAA 14PTA
PCRAO 14PTA
PCRAB 14PTA
scale 1:1



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

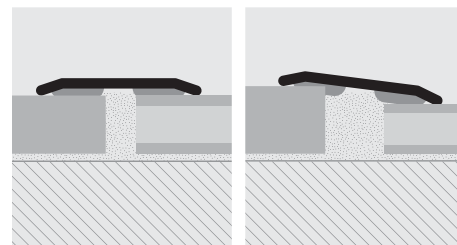

1. Choose the superficial finish of PROCOVER 14PT and cut it to the required length. 2. Degrease, wash and clean accurately the solid floor. 3. Remove the protective label from the sticker. 4. Lay the square pressing evenly without hammering.

threshold - joint-cover profiles

profiles
for floors

threshold - joint-cover profiles



PROSOL 18-30-35-40 in steel are self-adhesive joint - covers in stainless steel 1.4016 available in various widths. They are used to join floors of the same or differing material and thickness. The rounded shape also allows the profile to be used to edge shallow floors max. 5 mm thick. **PROSOL** is normally used to cover flaws and defects created during laying of ceramic/wood/parquet floors by covering the joint/threshold. **PROSOL** is recommended for all sorts of public environments: hotels, offices, shops and private dwellings; it guarantees an impeccable and attractive finish.

PROSOL 18-30-35-40

STAINLESS STEEL 1.4016 WITH ADHESIVE
WITH PROTECTIVE FILM



STAINLESS STEEL 1.4016 with adhesive thermo packed
bar length 2,7 LM - pack. 40 Pcs - 108 LM (W 35 - 40mm - 54 LM)

Article	Width - Thick.	€/LM	€/Pc
PLSAC 18A	18 mm - 10/10	4,49	12,12
PLSAC 30A	30 mm - 10/10	4,93	13,31
PLSAC 35A	35 mm - 10/10	5,55	14,99
PLSAC 40A	40 mm - 12/10	7,77	20,98




STAINLESS STEEL 1.4016 with adhesive thermo packed
bar length 0,83 LM - pack. 20 Pcs


Article	Width - Thick.	€/Pc
PLSAC 308AS	30 mm - 10/10	5,14
PLSAC 358AS	35 mm - 10/10	5,44

On demand 0,73 o 0,63 LM long (quantity, prices and delivery time to be agreed).


PLSAC 18A/189A
scale 1:1




PLSAC 30A/3010AS/309A/309AS/308A/308AS/3016AS
scale 1:1



PLSAC 35A/359A/359AS/358A/358AS
scale 1:1



PLSAC 40A/409AS
scale 1:1



threshold - joint-cover profiles

profiles
for floors

STAINLESS STEEL 1.4016 with adhesive thermo packed
bar length 0,83 LM - pack. 20 Pcs



Article	Width - Thick.	€/Pc
PLSAC 308A	30 mm - 10/10	4,11
PLSAC 358A	35 mm - 10/10	4,62

On demand 0,73 o 0,63 LM long (quantity, prices and delivery time to be agreed).

STAINLESS STEEL 1.4016 with adhesive thermo packed
bar length 0,93 LM - pack. 20 Pcs



Article	Width - Thick.	€/Pc
PLSAC 309AS	30 mm - 10/10	5,65
PLSAC 359AS	35 mm - 10/10	6,06
PLSAC 409AS	40 mm - 12/10	8,16

STAINLESS STEEL 1.4016 with adhesive thermo packed
bar length 0,90 LM - pack. 20 Pcs



Article	Width - Thick.	€/Pc
PLSAC 189A	18 mm - 10/10	4,88

STAINLESS STEEL 1.4016 with adhesive thermo packed
bar length 1,03 LM - pack. 20 Pcs



Article	Width - Thick.	€/Pc
PLSAC 3010AS	30 mm - 10/10	6,21

STAINLESS STEEL 1.4016 WITH ADHESIVE thermo packed
bar length 0,93 LM - pack. 20 Pcs





Article	Width - Thick.	€/Pc
PLSAC 309A	30 mm - 10/10	4,57
PLSAC 359A	35 mm - 10/10	5,24

STAINLESS STEEL 1.4016 WITH ADHESIVE thermo packed
bar length 1,66 LM - pack. 20 Pcs



Article	Width - Thick.	€/Pc
PLSAC 3016AS	30 mm - 10/10	9,76
PLSAC 3516AS	35 mm - 10/10	10,58

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

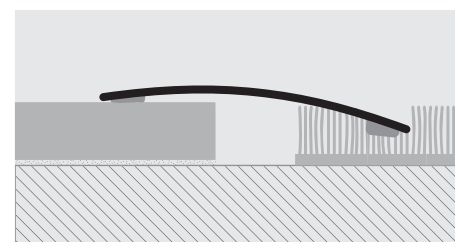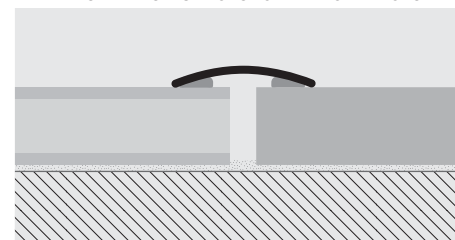


1. Choose the suitable profile and cut it to the necessary length. 2. Degrease, wash and clean the solid surface thoroughly. 3. Remove the protective paper from the adhesive. 4. Lay the profile by applying pressure evenly over the whole surface without using a hammer.

SUITABLE FOR USE IN CONTACT WITH FOODSTUFFS.

COLOURS



On demand hand-brushed stainless steel (prices and delivery time to be agreed)

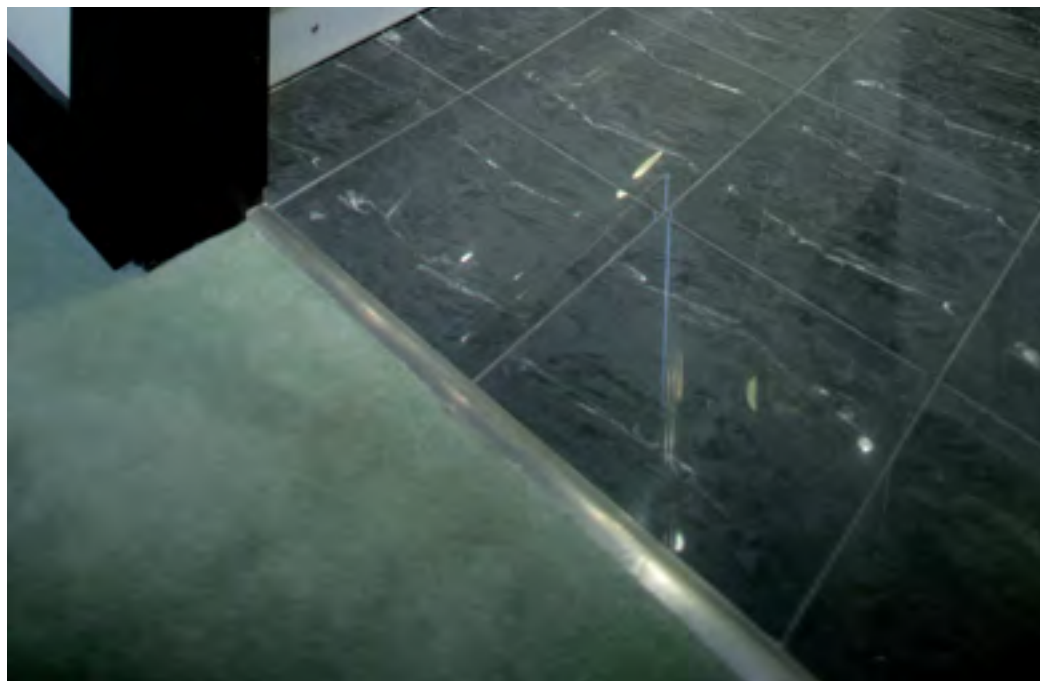


PROSOL 30-35-40


PUNCHED STAINLESS STEEL 1.4016
WITH PROTECTIVE FILM

threshold - joint-cover profiles


PLSAC 30F/308F/309F/308FS/309FS/3010FS/3016FS
scale 1:1



PLSAC 35F/358F/359F/358FS/359FS/3516FS
scale 1:1



PLSAC 40F/409FS
scale 1:1





PROSOL 30-35-40 in steel are punched joint - covers in stainless steel 1.4016 available in various widths. They are used to join floors of the same or differing material and thickness. The rounded shape also allows the profile to be used to edge shallow floors max. 5 mm thick. **PROSOL** is normally used to cover flaws and defects created during laying of ceramic/wood/parquet floors by covering the joint/threshold. **PROSOL** is recommended for all sorts of public environments: hotels, offices, shops and private dwellings; it guarantees an impeccable and attractive finish.



STAINLESS STEEL 1.4016 punched with protective film
bar length 2,7 LM - pack. 20 Pcs - 54 LM (L 30 mm - 108 LM)

Article	Width - Thick.	€/LM	€/Pc
PLSAC 30F	30 mm - 10/10	3,75	10,13
PLSAC 35F	35 mm - 10/10	4,47	12,07
PLSAC 40F	40 mm - 12/10	6,54	17,66

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

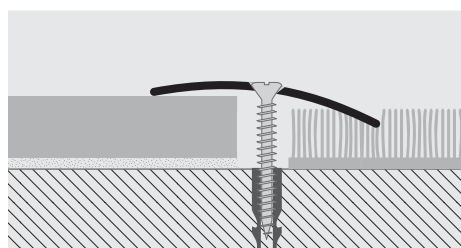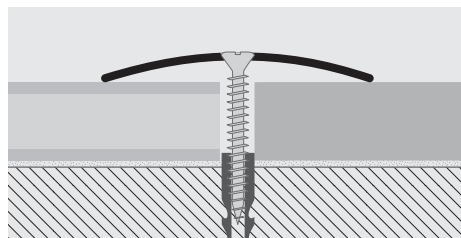

1. Choose the suitable profile and cut it to the necessary length.
2. Mark the position of the holes using the existing holes in the profile as reference. 3. Insert the screw anchors into the drilled holes. 4. Fix the profile using flathead screws suitable for the relative slots in the profile.

STAINLESS STEEL 1.4016 punched thermo packed
bar length 0,83 LM - pack. 20 Pcs



Article	Width - Thick.	€/Pc
PLSAC 308F	30 mm - 10/10	3,13
PLSAC 358F	35 mm - 10/10	3,70

STAINLESS STEEL 1.4016 punched thermo packed
bar length 0,93 LM - pack. 20 Pcs



Article	Width - Thick.	€/Pc
PLSAC 309F	30 mm - 10/10	3,49
PLSAC 359F	35 mm - 10/10	4,16

STAINLESS STEEL 1.4016 punched with screws and screw anchors thermo packed - bar length 0,83 LM - pack. 20 Pcs



Article	Width - Thick.	€/Pc
PLSAC 308FS	30 mm - 10/10	4,21
PLSAC 358FS	35 mm - 10/10	4,72

STAINLESS STEEL 1.4016 punched with screws and screw anchors thermo packed - bar length 0,93 LM - pack. 20 Pcs



Article	Width - Thick.	€/Pc
PLSAC 309FS	30 mm - 10/10	4,57
PLSAC 359FS	35 mm - 10/10	5,19
PLSAC 409FS	40 mm - 12/10	7,22

STAINLESS STEEL 1.4016 punched with screws and screw anchors thermo packed - bar length 1,03 LM - pack. 20 Pcs



Article	Width - Thick.	€/Pc
PLSAC 3010FS	30 mm - 10/10	5,08

STAINLESS STEEL 1.4016 punched with screws and screw anchors thermo packed - bar length 1,66 LM - pack. 20 Pcs



Article	Width - Thick.	€/Pc
PLSAC 3016FS	30 mm - 10/10	7,60
PLSAC 3516FS	35 mm - 10/10	8,99

COLOURS

(for a precise assessment of colours and finishes, see the relative enclosed sheet)



AC - Polished stainless steel 1.4016

On demand hand-brushed stainless steel (prices and delivery time to be agreed)

SUITABLE FOR USE IN CONTACT WITH FOODSTUFFS.

PROSOL 18-30-35-40 in brass are self-adhesive joint - covers in polished brass available in various widths. They are used to join floors of the same or differing material and thickness. The rounded shape also allows the profile to be used to edge shallow floors max. 5 mm thick. **PROSOL** is normally used to cover flaws and defects created during laying of ceramic/wood/parquet floors by covering the joint/threshold. **PROSOL** is recommended for all sorts of public environments: hotels, offices, shops and private dwellings; it guarantees an impeccable and attractive finish.

PROSOL 18-30-35-40

POLISHED BRASS WITH ADHESIVE
WITH PROTECTIVE FILM



POLISHED BRASS with adhesive thermo packed
bar length 2,7 LM - pack. 40 Pcs - 108 LM (W 35 - 40mm - 54 LM)

Article	Width - Thick.	€/LM	€/Pc
PLSOL 18A	18 mm - 10/10	6,06	16,36
PLSOL 30A	30 mm - 10/10	6,52	17,60
PLSOL 35A	35 mm - 10/10	8,01	21,63
PLSOL 40A	40 mm - 18/10	14,99	40,47

POLISHED BRASS with adhesive thermo packed
bar length 0,83 LM - pack. 20 Pcs

Article	Width - Thick.	€/LM	€/Pc
PLSOL 308A	30 mm - 10/10		5,39

On demand 0,73 o 0,63 LM long (quantity, prices and delivery time to be agreed).

POLISHED BRASS with adhesive thermo packed
bar length 0,90 LM - pack. 20 Pcs

Article	Width - Thick.	€/LM	€/Pc
PLSOL 189A	18 mm - 10/10		6,26

POLISHED BRASS with adhesive thermo packed
bar length 0,93 LM - pack. 20 Pcs

Article	Width - Thick.	€/LM	€/Pc
PLSOL 309A	30 mm - 10/10		6,06
PLSOL 359A	35 mm - 10/10		7,45
PLSOL 409A	40 mm - 18/10		13,86

POLISHED BRASS with adhesive thermo packed
bar length 1,03 LM - pack. 20 Pcs

Article	Width - Thick.	€/LM	€/Pc
PLSOL 3010A	30 mm - 10/10		6,73

POLISHED BRASS with adhesive thermo packed
bar length 1,66 LM - pack. 20 Pcs

Article	Width - Thick.	€/LM	€/Pc
PLSOL 3016A	30 mm - 10/10		10,83



POLISHED BRASS with adhesive thermo packed
bar length 0,83 LM - pack. 20 Pcs

Article	Width - Thick.	€/LM	€/Pc
PLSOL 308AS	30 mm - 10/10		6,26
PLSOL 358AS	35 mm - 10/10		7,60

POLISHED BRASS with adhesive thermo packed
bar length 0,93 LM - pack. 20 Pcs


Article	Width - Thick.	€/LM	€/Pc
PLSOL 309AS	30 mm - 10/10		6,83
PLSOL 359AS	35 mm - 10/10		8,42
PLSOL 409AS	40 mm - 18/10		15,07

POLISHED BRASS with adhesive thermo packed
bar length 1,03 LM - pack. 20 Pcs


Article	Width - Thick.	€/LM	€/Pc
PLSOL 3010AS	30 mm - 10/10		7,65
PLSOL 3510AS	35 mm - 10/10		9,29

POLISHED BRASS with adhesive thermo packed
bar length 1,66 LM - pack. 20 Pcs


Article	Width - Thick.	€/LM	€/Pc
PLSOL 3016AS	30 mm - 10/10		12,22
PLSOL 3516AS	35 mm - 10/10		14,93
PLSOL 4016AS	40 mm - 18/10		26,50




PLSOL 30A/308A/309A/3010A/3016A/308AS/309AS/3010AS/3016AS
scale 1:1



PLSOL 35A/359A/358AS/359AS/3510AS/3516AS
scale 1:1





PLSOL 40A/409A/409AS/416AS
scale 1:1



threshold - joint-cover profiles

profiles
for floors

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

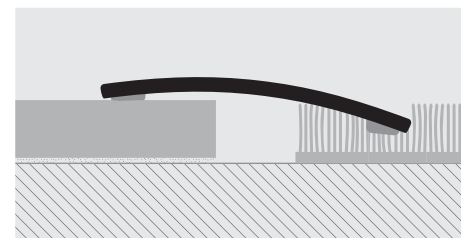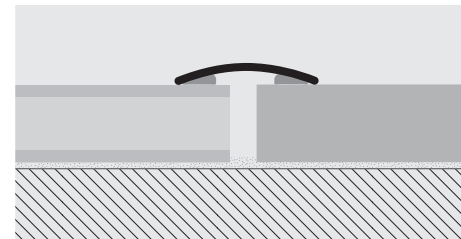

1. Choose the suitable profile and cut it to the necessary length.
2. Degrease, wash and clean the solid surface thoroughly. 3. Remove the protective paper from the adhesive. 4. Lay the profile by applying pressure evenly over the whole surface without using a hammer.

COLOURS

(for a precise assessment of colours and finishes, see the relative enclosed sheet)




PROSOL 30-35-40


PUNCHED POLISHED BRASS
WITH PROTECTIVE FILM

profiles
for floors


PLSOL 30F/308F/309F/3010F/3016F/308FS/309FS/3010FS/3016FS
scale 1:1





PLSOL 35F/359F/358FS/359FS/3510FS/3516FS
scale 1:1



PLSOL 40F/409F/409FS/4016FS
scale 1:1



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

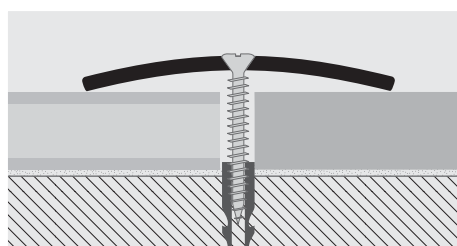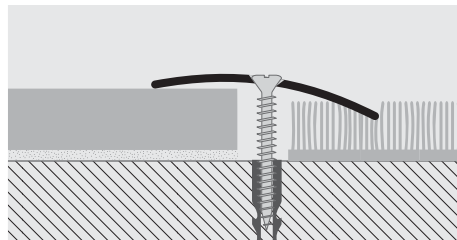

1. Choose the suitable profile and cut it to the necessary length.
2. Mark the position of the holes using the existing holes in the profile as reference.
3. Insert the screw anchors into the drilled holes.
4. Fix the profile using flathead screws suitable for the relative slots in the profile.

PROSOL 30-35-40 in brass are punched joint - covers in polished brass available in various widths. They are used to join floors of the same or differing material and thickness. The rounded shape also allows the profile to be used to edge shallow floors max. 5 mm thick. **PROSOL** is normally used to cover flaws and defects created during laying of ceramic/wood/parquet floors by covering the joint/threshold. **PROSOL** is recommended for all sorts of public environments: hotels, offices, shops and private dwellings; it guarantees an impeccable and attractive finish.



POLISHED BRASS punched with protective film
bar length 2,7 LM - pack. 40 Pcs - 108 LM (W 35 - 40mm - 54 ML)

Article	Width - Thick.	€/LM	€/Pc
PLSOL 30F	30 mm - 10/10	5,24	14,15
PLSOL 35F	35 mm - 10/10	6,68	18,04
PLSOL 40F	40 mm - 18/10	13,66	36,88

POLISHED BRASS punched thermo packed

bar length 0,83 LM - pack. 20 Pcs



Article	Width - Thick.	€/LM	€/Pc
PLSOL 308F	30 mm - 10/10		4,36

POLISHED BRASS punched thermo packed

bar length 0,93 LM - pack. 20 Pcs



Article	Width - Thick.	€/LM	€/Pc
PLSOL 309F	30 mm - 10/10		4,88
PLSOL 359F	35 mm - 10/10		6,21
PLSOL 409F	40 mm - 18/10		12,14

POLISHED BRASS punched thermo packed

bar length 1,03 LM - pack. 20 Pcs



Article	Width - Thick.	€/LM	€/Pc
PLSOL 3010F	30 mm - 10/10		5,44

POLISHED BRASS punched thermo packed

bar length 1,66 LM - pack. 20 Pcs



Article	Width - Thick.	€/LM	€/Pc
PLSOL 3016F	30 mm - 10/10		8,73



POLI. BRASS punched with screws and screw anchors thermo packed
bar length 0,83 LM - pack. 20 Pcs



Article	Width - Thick.	€/LM	€/Pc
PLSOL 308FS	30 mm - 10/10		5,49
PLSOL 358FS	35 mm - 10/10		6,78

On demand 0,73 o 0,63 LM long (quantity, prices and delivery time to be agreed).

POLI. BRASS punched with screws and screw anchors thermo packed
bar length 0,93 LM - pack. 20 Pcs



Article	Width - Thick.	€/LM	€/Pc
PLSOL 309FS	30 mm - 10/10		6,01
PLSOL 359FS	35 mm - 10/10		7,45
PLSOL 409FS	40 mm - 18/10		13,97

POLI. BRASS punched with screws and screw anchors thermo packed
bar length 1,03 LM - pack. 20 Pcs



Article	Width - Thick.	€/LM	€/Pc
PLSOL 3010FS	30 mm - 10/10		5,44
PLSOL 3510FS	35 mm - 10/10		8,27


POLI. BRASS punched with screws and screw anchors thermo packed
bar length 1,66 LM - pack. 20 Pcs



Article	Width - Thick.	€/LM	€/Pc
PLSOL 3016FS	30 mm - 10/10		10,48
PLSOL 3516FS	35 mm - 10/10		12,94
PLSOL 4016FS	40 mm - 18/10		24,55

COLOURS

(for a precise assessment of colours and finishes, see the relative enclosed sheet)



OL - Polished brass

PROSOL 30-35-40 are self-adhesive or punched joint - covers in polished brass available in various widths. They are used to join floors of the same or differing material and thickness. The rounded shape also allows the profile to be used to edge shallow floors max. 5 mm thick. **PROSOL** is normally used to cover flaws and defects created during laying of ceramic/wood/parquet floors by covering the joint/threshold. **PROSOL** is recommended for all sorts of public environments: hotels, offices, shops and private dwellings; it guarantees an impeccable and attractive finish.

PROSOL 18-30-35-40

ANOD. GOLD, SILVER AND BRONZE ALUMINIUM
SELF-ADHESIVE AND PUNCHED



ANODISED ALUMINIUM with adhesive thermo packed
bar length 2,7 LM - pack. 40 Pcs - 108 LM

Article	Width - Thick.	€/LM	€/Pc
PLS... 30A	30 mm - 10/10	4,31	11,64
PLS... 35A	35 mm - 10/10	5,19	14,01
PLS... 40A	40 mm - 18/10	6,06	16,36

ANODISED ALUMINIUM with adhesive thermo packed
bar length 0,83 LM - pack. 20 Pcs

Article	Width - Thick.	€/LM	€/Pc
PLS... 308AS	30 mm - 10/10	4,36	

On demand 0,73 o 0,63 LM long (quantity, prices and delivery time to be agreed).

ANODISED ALUMINIUM with adhesive thermo packed
bar length 0,93 LM - pack. 20 Pcs

Article	Width - Thick.	€/LM	€/Pc
PLS... 309AS	30 mm - 10/10	4,88	

ANODISED ALUMINIUM with adhesive thermo packed
bar length 1,03 LM - pack. 20 Pcs

Article	Width - Thick.	€/LM	€/Pc
PLS... 3010AS	30 mm - 10/10	5,34	

ANODISED ALUMINIUM with adhesive thermo packed
bar length 1,66 LM - pack. 20 Pcs

Article	Width - Thick.	€/LM	€/Pc
PLS... 3016AS	30 mm - 10/10	8,47	

ANODISED ALUMINIUM with adhesive thermo packed
bar length 0,93 LM - pack. 20 Pcs

Article	Width - Thick.	€/LM	€/Pc
PLS... 309A	30 mm - 10/10	4,01	

Available in the finishes: AA - AO - AB (AT, CH and SB available upon request with a minimum quantity order of 540 LM). The code of the selected colour must be added to the article code. E.g.: PLS... 30A (chosen finish Anod. silver) PLSAA 30A.



ANODISED ALUMINIUM punched thermo packed
bar length 2,7 LM - pack. 40 Pcs - 108 LM

Article	Width - Thick.	€/LM	€/Pc
PLS... 30F	30 mm - 10/10	3,13	8,45
PLS... 35F	35 mm - 10/10	4,01	10,83
PLS... 40F	40 mm - 18/10	4,93	13,31

ANODISED ALU. punched with screws and screw anchors thermo packed
bar length 0,83 LM - pack. 20 Pcs

Article	Width - Thick.	€/LM	€/Pc
PLS... 308FS	30 mm - 10/10	3,70	

ANODISED ALU. punched with screws and screw anchors thermo packed
bar length 0,93 LM - pack. 20 Pcs

Article	Width - Thick.	€/LM	€/Pc
PLS... 309FS	30 mm - 10/10	4,01	

ANODISED ALU. punched with screws and screw anchors thermo packed
bar length 1,66 LM - pack. 20 Pcs


Article	Width - Thick.	€/LM	€/Pc
PLS... 3016FS	30 mm - 10/10	6,83	

ANODISED ALUMINIUM punched thermo packed
bar length 0,93 LM - pack. 20 Pcs

Article	Width - Thick.	€/LM	€/Pc
PLS... 309F	30 mm - 10/10	2,93	


PLS... 30A/309A/308AS/309AS/3010AS/3016AS

scale 1:1



PLS... 35A

scale 1:1




PLS... 40A

scale 1:1



PLS... 30F/309F/308FS/309FS/3016FS

scale 1:1




PLS... 35F

scale 1:1






PLS... 40F

scale 1:1



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

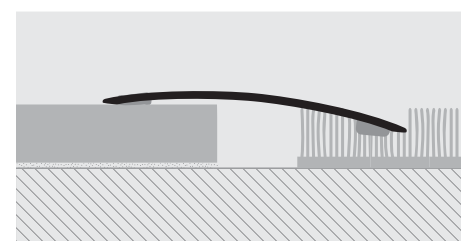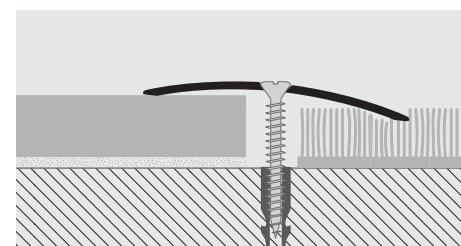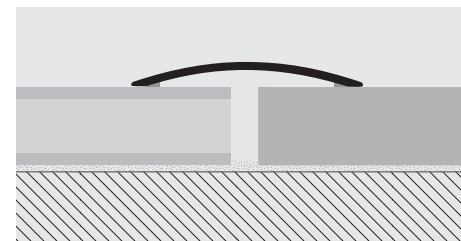

Adhesive version

1. Choose the suitable profile and cut it to the necessary length.
2. Degrease, wash and clean the solid surface thoroughly.
3. Remove the protective paper from the adhesive.
4. Lay the profile by applying pressure evenly over the whole surface without using a hammer.

Punched version

1. Choose the suitable profile and cut it to the necessary length.
2. Mark the position of the holes using the existing holes in the profile as reference.
3. Insert the screw anchors into the drilled holes.
4. Fix the profile using flathead screws suitable for the relative slots in the profile.

COLOURS

(for a precise assessment of colours and finishes, see the relative enclosed sheet)

AA - Anod. silver alu.	AO - Anod. Gold alu.	AB - Anod. bronze alu.	AT - Anod. titanium aluminium	CH - Anod. Champagne alu.	SB - Anod. Sand aluminium

UPON REQUEST-MINIMUM QUANTITY 540 LM
(price and delivery time to be agreed)



PROLEVALL 25-35-38 are joint – covers in anodised aluminium with gold, silver and bronze finish in various widths with a more or less knurled flat surface, available with self-adhesive backing or punched in various lengths. They are used to join floors of the same or differing material e.g. ceramic tiles, wood, marble, parquet or laminated, mainly to cover flaws created during laying or expansion joints. The chamfered edges ensure perfect adhesion to the floor, while the flat top allows perfect door closure. Recommended for dwellings and public environments with intense pedestrian traffic. Easy to lay; the high-strength elastomer adhesive ensures an excellent grip.

PROLEVALL 25-35-38

ANOD. GOLD, SILVER AND BRONZE ALUMINIUM
SELF-ADHESIVE AND PUNCHED



ANODISED ALUMINIUM with adhesive thermo packed
bar length 2,7 LM - pack. 40 Pcs - 108 LM

Article	Width mm	€/LM	€/Pc
PLV... 25A	25	4,31	11,64
PLV... 35A	35	5,14	13,88
PLV... 38A	38	5,60	15,12

ANODISED ALUMINIUM with adhesive thermo packed
bar length 0,93 LM - pack. 20 Pcs

Article	Width mm	€/LM	€/Pc
PLV... 259AS	25		4,88
PLV... 359AS	35		5,60
PLV... 389AS	38		6,11

ANODISED ALUMINIUM with adhesive thermo packed
bar length 1,03 LM - pack. 20 Pcs

Article	Width mm	€/LM	€/Pc
PLV... 3510AS	35		6,16

ANODISED ALUMINIUM with adhesive thermo packed
bar length 1,66 LM - pack. 20 Pcs

Article	Width mm	€/LM	€/Pc
PLV... 3516AS	35		9,86

ANODISED ALUMINIUM punched thermo packed
bar length 2,7 LM - pack. 40 Pcs - 108 LM

Article	Width mm	€/LM	€/Pc
PLV... 25F	25	3,18	8,59
PLV... 35F	35	4,01	10,83
PLV... 38F	40	4,47	12,07

OFF-CENTRE HOLES ON DEMAND

ANODISED ALU. punched with screws and screw anchors
thermo packed - bar length 0,93 LM - pack. 20 Pcs

Article	Width mm	€/LM	€/Pc
PLV... 259FS	25		4,06
PLV... 359FS	35		4,78
PLV... 389FS	38		5,03

ANODISED ALU. punched with screws and screw anchors
thermo packed - bar length 1,03 LM - pack. 20 Pcs

Article	Width mm	€/LM	€/Pc
PLV... 3510FS	35		5,24

ANODISED ALU. punched with screws and screw anchors
thermo packed - bar length 1,66 LM - pack. 20 Pcs

Article	Width mm	€/LM	€/Pc
PLV... 3516FS	35		8,16


Available in the finishes: AA - AO - AB (AT, CH and SB available upon request with a minimum quantity order of 540 LM). The code of the selected colour must be added to the article code. E.g: PLV... 25A (chosen finish Anod. Gold) PLVAO 25A.

COLOURS


(for a precise assessment of colours and finishes, see the relative enclosed sheet)

AA - Anod. silver alu.	AO - Anod. Gold alu.	AB - Anod. bronze alu.	AT - Anod. titanium aluminium	CH - Anod. Champagne alu.	SB - Anod. Sand aluminium

UPON REQUEST-MINIMUM QUANTITY 540 LM

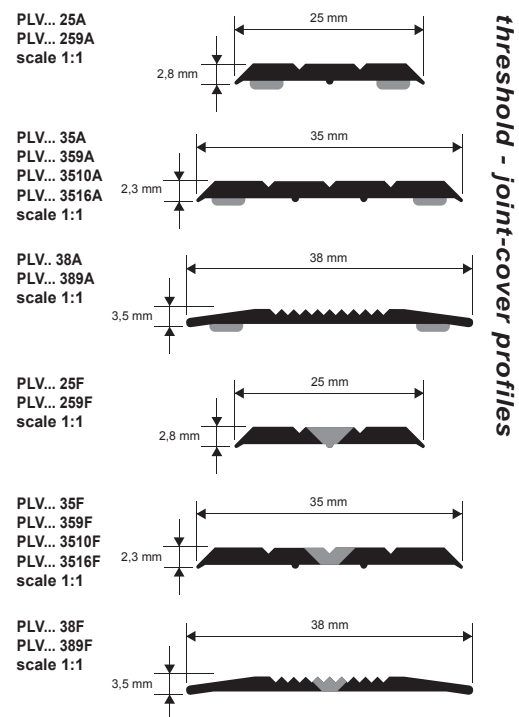

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

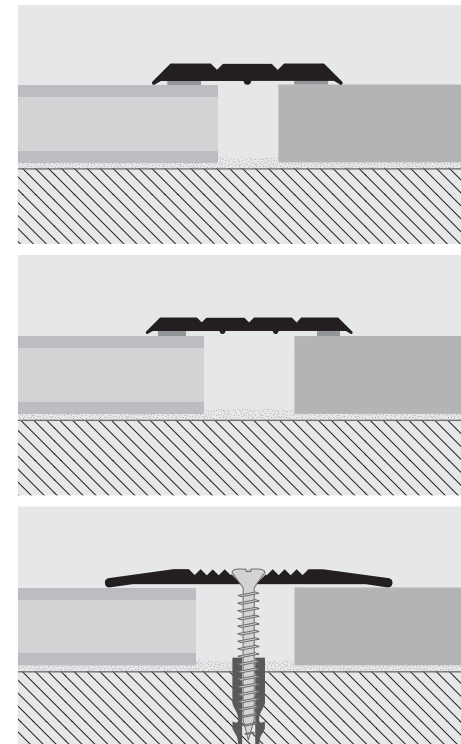

Adhesive version

1. Choose the suitable profile and cut it to the necessary length.
2. Degrease, wash and clean the solid surface thoroughly. 3. Remove the protective paper from the adhesive. 4. Lay the profile by applying pressure evenly over the whole surface without using a hammer.

Punched version

1. Choose the suitable profile and cut it to the necessary length.
2. Mark the position of the holes using the existing holes in the profile as reference. 3. Insert the screw anchors into the drilled holes. 4. Fix the profile using flathead screws suitable for the relative slots in the profile.

PROMOQUETTE

ANOD. GOLD, SILVER AND BRONZE
ALUMINIUM WITH OR WITHOUT ADHESIVE

profiles
for floors


PMQ... 12 / 126/2
scale 1:1



PMQ... 12A / 127AS / 128AS / 129AS
scale 1:1




EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

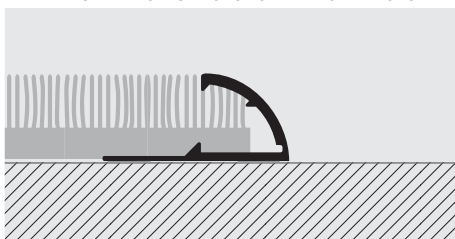

1. Cut the profile to the necessary length. 2. Fix the PROMOQUETTE to the floor using screws/nails or double-sided adhesive tape. 3. Insert the carpeting into the curved side with the necessary tension. 4. Apply pressure evenly over the edge of the profile until it closes over and secures the carpeting.

PROMOQUETTE is an anodised aluminium rounded edging profile with tap-down edge, which is ideal for the clean-cut, elegant finishing of carpeted floors. The carpeting is inserted inside the curved/rounded section, which is then pressed down until the carpeting is secured, thereby also protecting the edge. **PROMOQUETTE** ensures a perfect finish, covering any flaws created during laying and protecting the edge. Easy to lay with the self-adhesive backing ensuring perfect adherence to the floor.

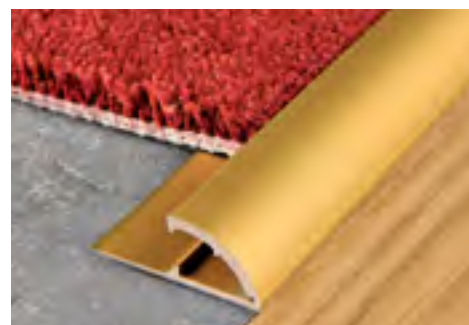

ANODISED GOLD, SILVER AND BRONZE ALUMINIUM thermo packed bar length 2,7 LM - pack. 40 Pcs - 108 LM

Article	H mm	€/LM	€/Pc
PMQ... 12A (with adhesive)	7/12	4,42	11,93
PMQ... 12 (without adhesive)	7/12	3,39	9,15

ANODISED GOLD, SILVER AND BRONZE ALUMINIUM thermo packed bar length 0,67 LM - pack. 2 PCS

Article	H mm	€/LM	€/Pc
PMQ... 126/2 (without adhesive)	7/12		5,96

ANODISED GOLD, SILVER AND BRONZE ALUMINIUM thermo packed bar length 0,73 LM - pack. 20 Pcs

Article	H mm	€/LM	€/Pc
PMQ... 127AS (with adhesive)	7/12		4,06

ANODISED GOLD, SILVER AND BRONZE ALUMINIUM thermo packed bar length 0,83 LM - pack. 20 Pcs

Article	H mm	€/LM	€/Pc
PMQ... 128AS (with adhesive)	7/12		4,57

ANODISED GOLD, SILVER AND BRONZE ALUMINIUM thermo packed bar length 0,93 LM - pack. 20 Pcs

Article	H mm	€/LM	€/Pc
PMQ... 129AS (with adhesive)	7/12		4,98

Available in the finishes: AA - AO - AB. The code of the selected colour must be added to the article code. E.g.: PMQ... 12A (finish: Anod. Gold) PMQA0 12A.

COLOURS

(for a precise assessment of colours and finishes, see the relative enclosed sheet)



PROFLOOR 1216


ANOD. GOLD, SILVER AND BRONZE
ALUMINIUM PUNCHED OR NOTCHED

carpet gripper profiles


PMF... 14F
scale 1:1



PMF... 14D
scale 1:1

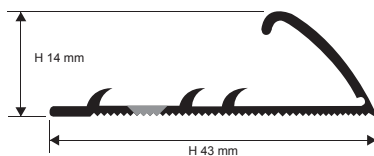

EXAMPLES OF LAYING

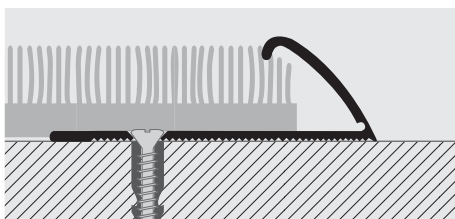

PROMOQUETTE FIX is a profile in anodised aluminium made as a terminal profile to edge carpeted floors held under tension or simply laid with double-sided adhesive tape. Two versions are available: notched or with holes/notches for laying under tension and then permanently fixed with screws/nails; or the punched version to edge without holding under tension. **PROMOQUETTE FIX** ensures an impeccable finish to the edge of carpeting that is not always perfectly cut. It speeds up laying time and the result is attractive.



ANODISED GOLD, SILVER AND BRONZE ALUMINIUM thermo packed bar length 2,7 LM - pack. 20 Pcs - 54 LM

Article	H mm	€/LM	€/Pc
PMF... 14F (punched)	14	3,80	10,26
PMF... 14D (notched)	14	5,75	15,53

Available in the finishes: AA - AO - AB. The code of the selected colour must be added to the article code.

E.g.: PMF... 14F (chosen finish Anod. Gold) PMFA0 14F.

COLOURS

(for a precise assessment of colours and finishes, see the relative enclosed sheet)



PROMOQUETTE GIN is a profile in anodised aluminium with tap-down edge for edging or joining floors in carpeting, PVC, linoleum, ceramic tiles/wood, etc. Two versions are available: punched for laying under tension and then permanently fixed with screws/nails or the adhesive version for laying with glue and which can be taken up if required. **PROMOQUETTE GIN** guarantees an impeccable finish and offers the dual function of both joining and of covering any flawed edges of the floors. It speeds up laying time and the result is attractive.



ANODISED GOLD, SILVER AND BRONZE ALUMINIUM
thermo packed - bar length 2,7 LM - pack. 20 Pcs - 54 LM

Article	H mm	€/LM	€/Pc
PMG... 813F (punched)	8/13	5,75	15,53
PMG... 813A (with adhesive)	8/13	7,29	19,68

Available in the finishes: AA - AO - AB (AT, CH and SB available upon request with a minimum quantity order of 540 LM). The code of the selected colour must be added to the article code.
E.g.: PMG... 813 (chosen finish Anod. Gold) PMGAO 813F.

COLOURS


(for a precise assessment of colours and finishes, see the relative enclosed sheet)

AA - Anod. silver alu.	AO - Anod. Gold alu.	AB - Anod. bronze alu.	AT - Anod. titanium aluminium	CH - Anod. Champagne alu.	SB - Anod. Sand aluminium
UPON REQUEST-MINIMUM QUANTITY 540 LM					


PROMOQUETTE GIN

ANOD. GOLD, SILVER AND BRONZE
ALUMINIUM PUNCHED AND ADHESIVE

PMGD... 813A
scale 1:1

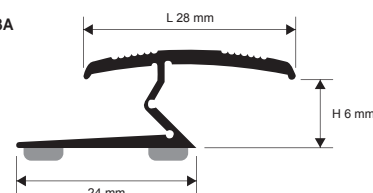


PMG... 813F
scale 1:1

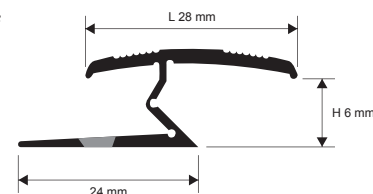

carpet gripper profiles

profiles
for floors

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

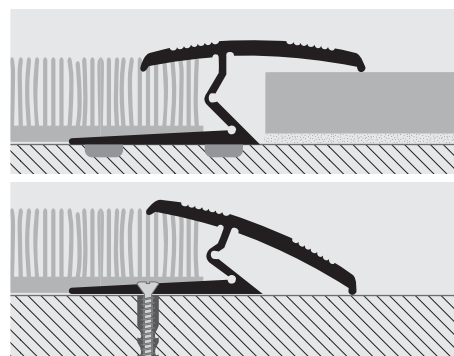

1. Cut the profile to the necessary length. 2. Fix the PROMOQUETTE GIN to the floor using screws/nails or two-sided adhesive tape. 3. Lay the required floor, inserting the carpeting, PVC, linoleum, ceramic tile or wood under the upper curved part. 4. Apply pressure evenly on the edges of the profile until they close and secure the flooring on both sides.

PROMOQUETTE CLIP is a jointing profile in anodised aluminium created to join carpeted floors. It comprises two profiles: a punched or notched base and a knurled "top" profile to be inserted into the base when it has been laid. Two versions are available: notched for laying under tension and then permanently fixed with screws/nails or the adhesive version for laying with glue and which can be taken up if required. **PROMOQUETTE CLIP** guarantees an impeccable finish in joining carpeted floors. It speeds up laying time and the result is attractive.

PROMOQUETTE CLIP

ANOD. GOLD, SILVER AND BRONZE
ALUMINIUM PUNCHED AND
NOTCHED TOP AND BASE



ANODISED GOLD, SILVER AND BRONZE ALUMINIUM
thermo packed - bar length 2,7 LM - pack. 20 Pcs - 54 LM

Article	H mm	€/LM	€/Pc
PMC... 525F (punched Base)	5	9,14	24,68
PMC... 525D (notched Base)	5	9,96	26,89


Available in the finishes: AA - AO - AB. The code of the selected colour must be added to the article code.
E.g.: PMC... 525F (chosen finish Anod. Gold) PMCAO 525F.

COLOURS

(for a precise assessment of colours and finishes, see the relative enclosed sheet)

AA - Anod. silver alu.	AO - Anod. Gold alu.	AB - Anod. bronze alu.
------------------------	----------------------	------------------------

PMC... 525F
scale 1:1




PMC... 525D
scale 1:1




carpet gripper profiles

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

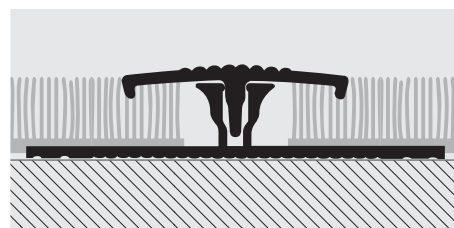

1. Cut the profile to the necessary length. 2. Fix the punched/notched base to the floor using screws/nails or two-sided adhesive tape. 3. Lay the carpeting by gluing or holding under tension. 4. With the help of a wooden tapping block and a hammer, apply pressure evenly over the whole of the top profile until it clicks into the base, thereby securing the carpeting on both sides.

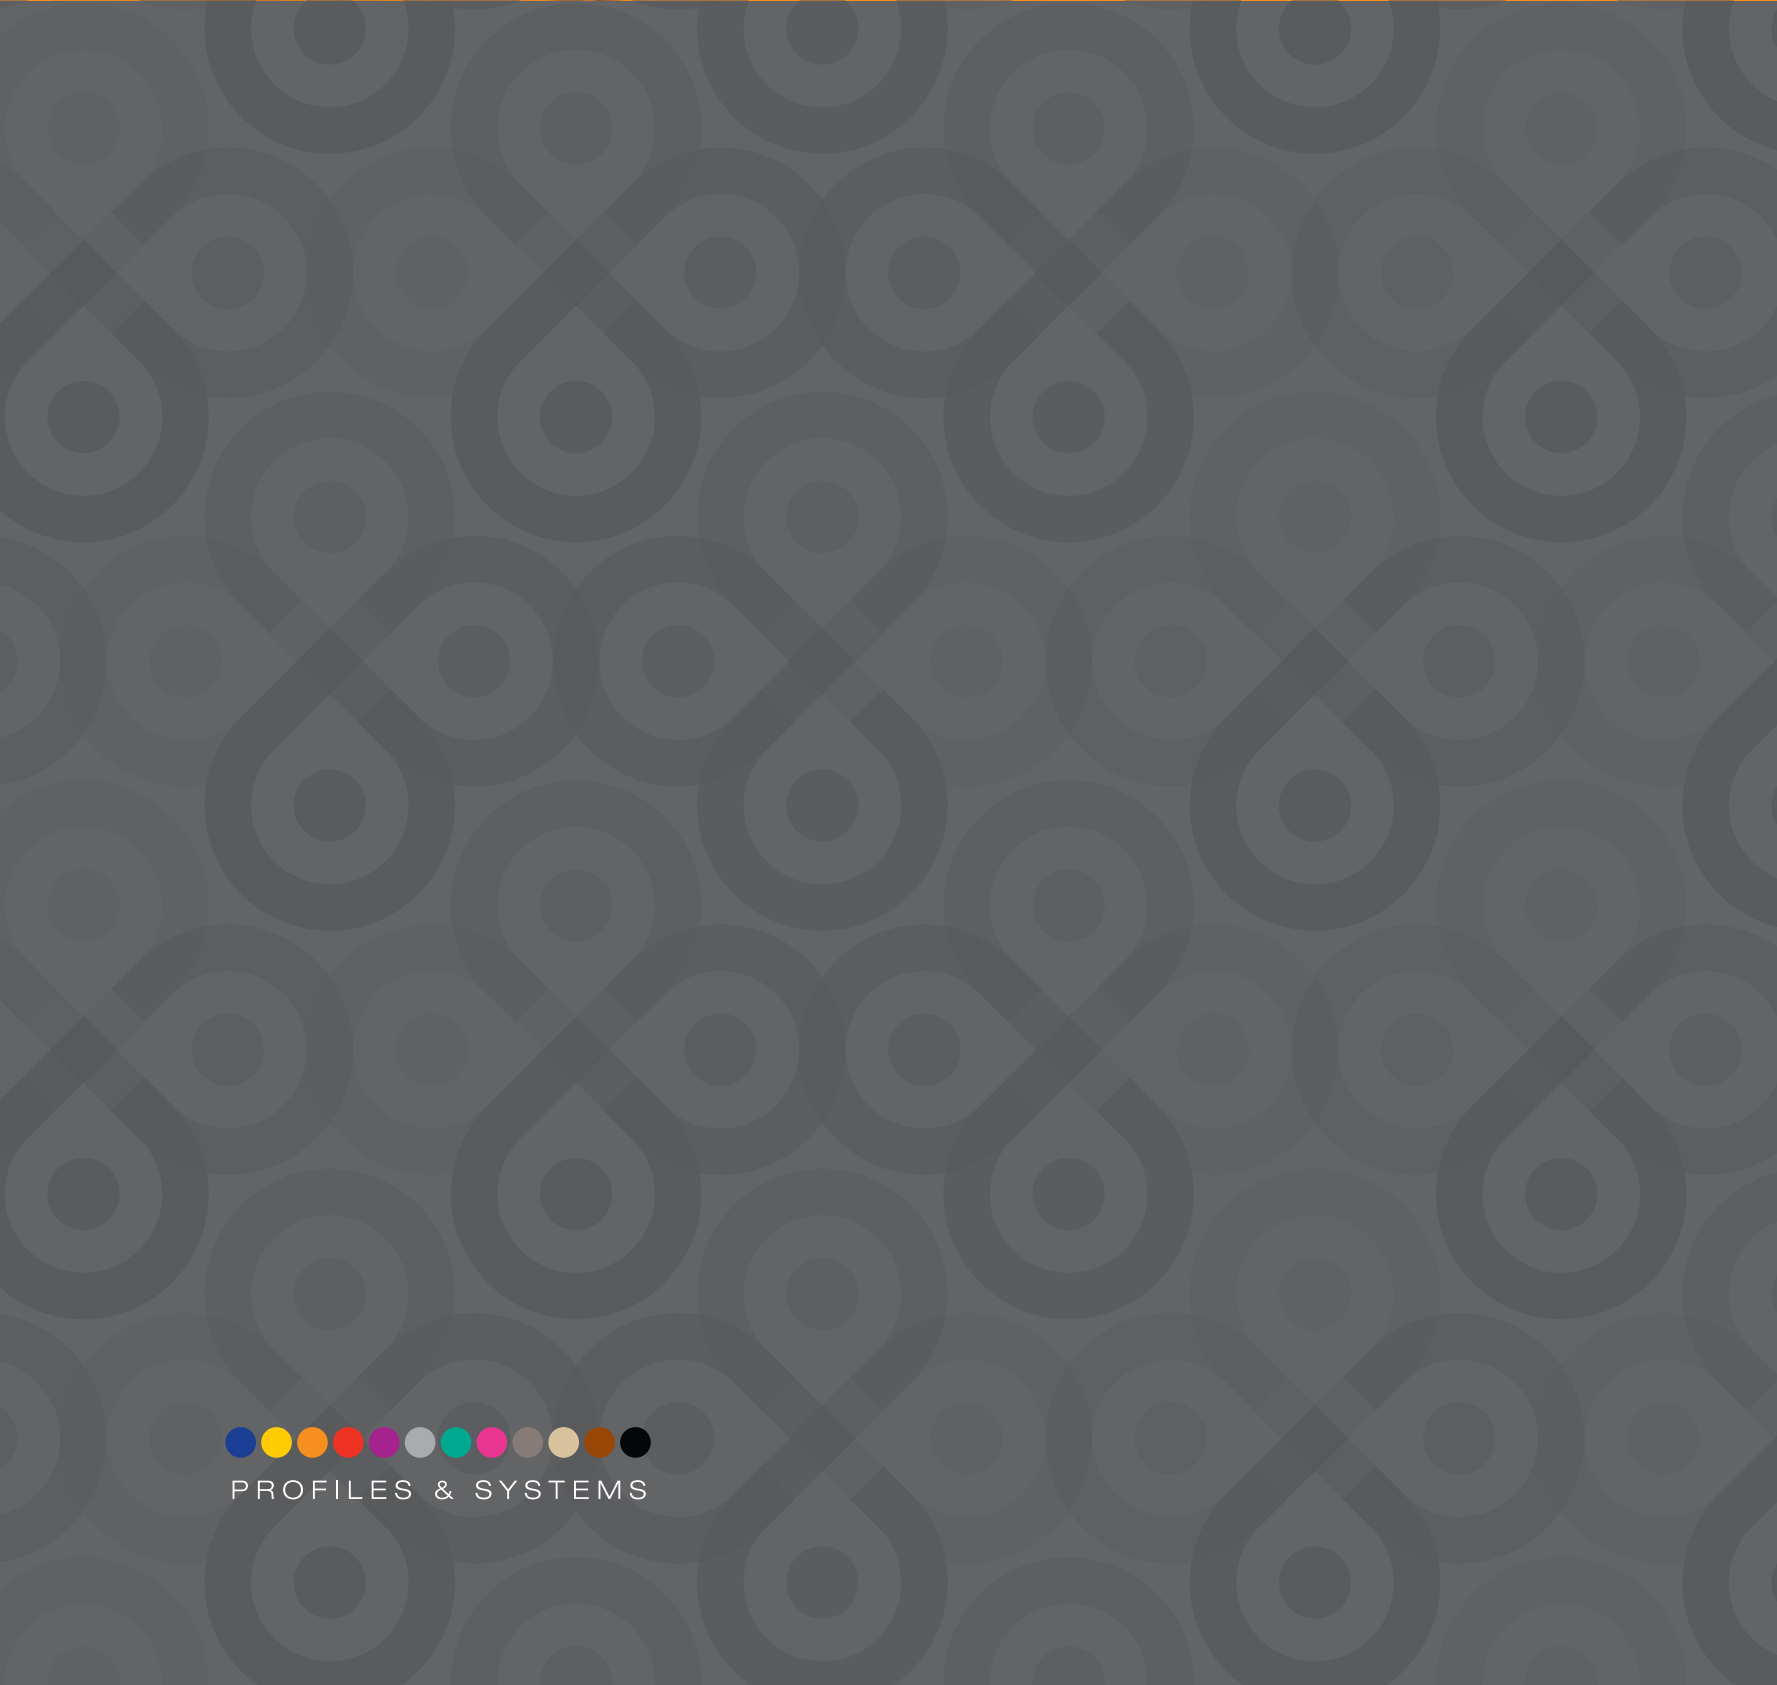

PROFILES & SYSTEMS