PROSUPPORT TUBE SYSTEM

ADJUSTABLE AND MODULAR SUPPORTS SYSTEM FOR OUTDOOR FLOATING FLOORS

PROSUPPORT TUBE SYSTEM is an adjustable and modular supports system for outdoor floating floors from the height of 29 mm to 1000 mm. The system is composed of 1 base, 2 screws, 1 flange, 2 heads and several pvc pipes to obtain the requested height. Both heads, according to the screw, can be fix or self-levelling.



PROSUPPORT TUBE SYSTEM KIT HEIGHTS

FULL KIT - Pack. 40 Pcs. - Items not for sale individually. Minimum order one pack.

A: SUPPORT'S HEIGHT WITH SELF-LEVELING INSTALLATION
B: SUPPORT'S HEIGHT WITH FIX SIDE INSTALLATION
T: THICKNESS OF THE SPACER FLAP



FULL KII CODE				
PST3454/4 T = 4 mm	PST3454/2 T = 2 mm			
€/Pc. 4,43				

€/Pack. 177,20



FULL KIT CODE			
PST5474/4 T = 4 mm	PST5474/2 T = 2 mm		
€/Pc. 4,76			

€/Pack. 190,40



FULL KIT CODE					
PST7494/4					
€/Pc. 6,71					
€/Pack. 268,40					



FULL KIT CODE					
PST94114/4					
€/Pc. 7,22					
€/Pack. 288,80					



FULL KIT CODE					
PST114134/4 PST114134/2 T = 4 mm					
€/Pc. 7,61					

€/Pack. 304,40



PST134154/4 T = 4 mm	PST134154/2 T = 2 mm				
€/Pc. 7,98					
E/Dack	210.20				



PST154174/4 T = 4 mm	PST154174/2 T = 2 mm
€/Pc	. 9,51
E/Dack	200.40



FULL KIT CODE						
PST174194/4						
€/Pc. 9,75						
€/Pack. 390,00						



T = 4 mm	T = 2 mm			
€/Pc. 9,95				
€/Pack. 398,00				

HEIGHTS GREATER THAN 209 mm


H (mm) SELF-LEVELING HEAD (A)	H (mm) FIX HEAD (B)	Choose the kit according to desired tile joint (T)	the	PIPE		FLANGE	€/PC.
		PST3454/4				PSTGH 02	
214/234	209/229		+	PSTT 175	+		11,18
234/254	229/249		+	PSTT 195	+		11,85
254/274	249/269	T: 4 / 2 mm	+	PSTT 215	+		12,26
274/294	269/289	1:4/2 mm ▶⊸4	+	PSTT 235	+		12,76
294/314	289/309		+	PSTT 255	+		13,36
314/334	309/329		+	PSTT 275	+		14,07
334/354	329/349		+	PSTT 295	+		14,07
354/374	349/369		+	PSTT 315	+		14,97
374/394	369/389		+	PSTT 335	+		14,97
394/414	389/409		+	PSTT 355	+	PSTGH 02	16,14
414/434	409/429	/->	+	PSTT 375	+		16,14
434/454	429/449	PST3454/	+	PSTT 395	+		17,68
454/474	449/469	1313434/	+	PSTT 415	+		17,68
474/494	469/489		+	PSTT 435	+		17,68
494/514	489/509		+	PSTT 455	+		19,86

SELF-LEVELING HEAD MODE

FIXED HEAD MODE

Self-levelling head mode Max height 1000 mm with max slope of 5%.

Fixed head mode Max height 1000 mm

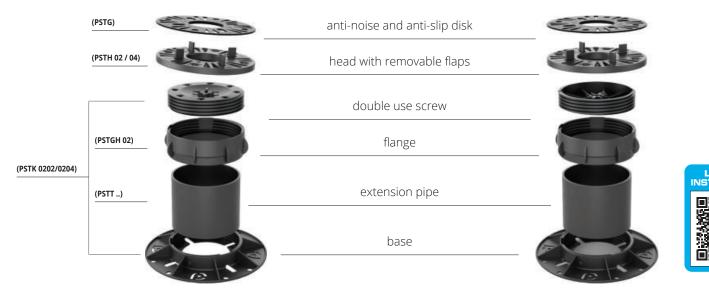

PROSUPPORT TUBE SYSTEM COMPONENTS

BASE +SCREW 20/40 mm

polypropylene - pack. 40 Pc. (PSTK 0202) - pack. 20 Pc. (PSTK 0204)

Article	Thickness (mm)	kit / pack.	€/Pc	€/pack.
PSTK 0202	20	40	3,30	132,00
PSTK 0204	40	20	3,61	72,20

Items not for sale individually. Minimum order one pack.

PSTK 0202

BASE + SCREW 20 mm



BASE + SCREW 40 mm

HEAD with removable flaps 2/4 mm polypropylene - pack. 40 Pc.

Article	flap Thk (mm)	kit/pack.	€/Pc	€/pack.
PSTH 02	2	40	1,13	45,20
PSTH 04	4	40	1,13	45,20

Items not for sale individually. Minimum order one pack.



PSTH 02 / PSTH 04

FLAP THICKNESS 2 mm - PSTH 02



FLAP THICKNESS 4 mm - PSTH 04

FLANGE 40 mm

polypropylene - pack. 40 pcs

Article	H (mm)	Pc/pack.	€/Pc	€/Pack.	
PSTGH 02	40	40	1,77	70,80	
Connection r	ut with a lov	ver side of '	110 mm inn	er diameter,	

where the pipe of different heights should be inserted, and one side with thread where the regulation screws should be inserted.

Items not for sale individually. Minimum order one pack.



PSTGH 02

ANTI-NOISE AND ANTI-SLIP DISK rubber - H 1,5 mm - Ø 150 - pack. 120 pcs

	2 13 page 12 p					
Article	H/Ømm	Pc/pack.	€/Pc	€/Pack.	l	
PSTG	H 1,5 - Ø150	120	1,08	129,60		

The non-slip rubber disk to be used with the heads of PROSUPPORT TUBE SYSTEM reduces noises till 25 dB.

Items not for sale individually. Minimum order one pack.



PSTG

PRE-CUT EXTENSION PIPE - outer diameter Ø110 mm Thickness 4 mm - polyethylene polypropylene - pack. 40 Pc.

Article	H (mm)	Pc/pack.	€/Pc	€/pack.
PSTT 35	35	40	0,50	20,00
PSTT 55	55	40	1,02	40,80
PSTT 75	75	40	1,39	55,60
PSTT 95	95	40	1,77	70,80
PSTT 115	115	40	3,30	132,00
PSTT 135	135	40	3,55	142,00
PSTT 155	155	40	3,74	149,60

Items not for sale individually. Minimum order one pack.



FULL LENGHT EXTENSION PIPE - outer diameter Ø110 mm Thickness 4 mm - polyethylene or polypropylene - pallet 43 Pc.

Article	H (ml)	ml/pallet.	€/ml	€/Pc	€/pallet
PSTT 2700	2,7	116	24,09	65,04	2796,72

Items not for sale individually. Minimum order one pallet.

UPON REQUEST IT IS POSSIBLE TO HAVE HEIGHTS TILL 1000 MM USING PIPES FROM 155 TILL 955. For information and installation instructions ask for the technical data sheet. Price to be agreed. Production delay 4/5 weeks.

PSTT 2700

270 cm






PRODUCTS FOR LAYING

PERIMETER SPACER

Perimeter spacer of stainless steel AISI 316L / 1.4404 - V4A for laying outdoor floating floors. The profile makes a 5 mm wide perimeter gap, for the outflow of rainwater; moreover, thanks to the rounded flin with which is provided, it does not damage the waterproofing sheath. The slit width of 0.5 cm and the length of 18 cm ensure a perfect anchorage of the spacer with the heads of the Prosupport System.

DPP





PERIMETER SPACER PROSUPPORT SYSTEM
Stainless steel AISI 316L / 1.4404 - V4A - pack. 40 Pcs

steel AISI 316L / 1.4404 - V4A - pack. 40 Pcs					
Article	€/Pc	€/Pack.			
	3,55	142,00			

PROSUPPORT TUBE SYSTEM OPTIONAL

ADJUSTING KEY (only for head PSTH 04)

	Article	€/Pc
PSTAK		31,50
	(2)	
	V	

ADJUSTABLE SPACER TABS 4 mm polypropylene - Pack 80 pcs

Article	L x H mm	Pcs/pack	€/Pc	€/Pack.
PSTJ	80 x 20	80	0,83	66,40
Chacor tabe 01	nm long t	a ha fiyad a	n the colf le	volling hoad

Spacer tabs 80 mm long to be fixed on the self-levelling head, which allow the fixing of wooden, WPC and aluminium joists of max width 80 mm.



Items not for sale individually. Minimum order one pack.

FIXING CLIP FOR TILES - WIND-PROOF Pack 40 pairs

Article	LxHmm	pairs/pack	€/Pair	€/Pack.
PSTWP	20 x 60	40	6,09	243,60

Fastening clip to fix the tiles and block the floor in case of strong wind. The clips must be inserted inside the cross joint or along the perimeter of the floor.



Items not for sale individually. Minimum order one pack.

RUBBER DISK for laying on bituminous roof membrane

H 2 mm - Pack. **100 Pcs** (box 100 pcs)

Article	H (mm)	€/Pc	€/Pack.		
LVGG 02	2	1,96	196,00	*	

Rubber disc, 2 mm thick, to be applied under the support (SQG 15) to protect the bituminous membrane.



SPACER FOR APPLICATION ON GRAVEL

Pack. **100 Pcs** (box 100 pcs)

Article	€/Pc	€/Pack.	
DILV	0,91	91,00	

Transparent plastic 4 mm cross spacer for laying on gravel or irregular surfaces.







PROSUPPORT PROFILE T & N is a profile for the protection and finishing of the external edge of raised floors in ceramic, wood and composite materials. The vertical section of the profiles features a specially designed fins that create a dovetail cladding system. This dovetail cladding system allows for the adhesive used to fix the covering to also mechanically bond to the profiles. The profile is also available with a decorative edge of 2 cm height (PROSUPPORT PROFILE T).

PROSUPPORT PROFILE T & N

L 177,7 mm

PSPRPT 20AL..

VARNISHED ALUMINIUM NATURAL ALUMINIUM



PROSUPPORT PROFILE T - VARNISHED ALUMINIUM bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	L x H mm	h mm	€/lm	€/Pc
PSPRPT 20AL	177,7x81,5	60	31,34	84,62

COLOURS (EMBOSSED) GF - Grey (7038) A - Anthracite grey - (no RAL)



PROSUPPORT PROFILE N - NATURAL ALUMINIUM bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	H mm	L	€/lm	€/Pc
PSPRP 15560AL	60	156,5	20,89	56,40

COLOURS

PROSUPPORT SYSTEM A&B Perimeter profile to protect and finish the outer edge of raised floors of different types, ceramic, wood, stone etc. The PROSUPPORT PROFILE A consists in an "L"-shaped horizontal flat base to insert and anchor above the PROSUPPORT Self-levelling head and a vertical visible part to insert in the vertical "L"-shaped element (as indicated in the drawing).

Use: Perimeter profile to protect and finish the outer edge of raised floors of different types, ceramic, wood, marble etc. The PROSUPPORT PROFILE consists in an "L"-shaped horizontal flat base to insert and anchor above the PROSUPPORT Self-levelling head and a vertical visible





* ON DEMAND (EMBOSSED)



LAYING INSTRUCTIONS

1. Choose "PROSUPPORT PROFILE" desired model. 2. Cut "PROSUPPORT PROFILE" to the desired lenght and put on the supports and aligning. 3. Lay the floor by adjusting the height of the supports until completely leveling. **4.** Cut the tiles of the correct size to close the perimeters of the floating floor. **5.** Fix on the vertical surface of the profile the tiles using a suitable adhesive.



VARNISHED ALUMINIUM, NATURAL ALUMINIUM




part to insert in the vertical "L"-shaped element (as indicated in the drawing)

PUNCHED AND PERFORATED PROSUPPORT A NATURAL ALUMINIUM - length 2,7 lm - pack. 20 Pcs

Article	LxH	€/lm	€/Pc
BPPSAN 15015	150 X 15	27,36	73,87
BPPSAN 15020	150 X 20	28,67	77,41
BPPSAN 15025	150 X 25	29,98	80,95

COLOURS





TOP PROFILE PROSUPPORT B - VARNISHED ALUMINIUM length 2,7 Im Pack 10 Pcs (PFPSAL...1060 Pack 20 Pcs)


Article	H1	€/lm	€/Pc
PFPSAL 1060	60	20,25	54,68
PFPSAL 1080	80	23,51	63,48
PFPSAL 10100	100	26,45	71,42


COLOURS (EMBOSSED)



* ON DEMAND (EMBOSSED)








PRORAIL SYSTEM

PRORAIL SYSTEM SYSTEM is a modular system composed of aluminium joists to lay floating floors of any size, to create steady and modular substructures together with PROSUPPORT TUBE and PROSUPPORT SLIM. The system consists of two aluminium joists, PRORAIL and PRORAIL RET, one fastening ring PRORAIL RING, two cross spacers with removable flaps PRORAIL SPACER and one anti-noise and anti-slip rubber PRORAIL RUBBER





PRORAIL - SHAPED JOIST


aluminium - Pack 10 Pcs - Bar lenght 2,7 Lm					
Article	L x H (mm)	Pc/Pack	€/lm	€/Pc	
PSTRAN 53	50 X 30	10	16,48	44,50	




PRORAIL RUBBER

Roll lenght 110 Lm

Article	L roll ml	€/lm	€/roll
PSTRI	110	1,90	209,00







aluminium - Pack 10 Pcs - Bar lenght 2,7 ML

Article	L x H (mm)	Pc/Pack	€/lm	€/Pc
PSTRAN 5030	50 X 30	10	11,41	30,81



PRORAIL RING - JOIST FASTENING RING polypropylene - Pack 40 Pcs

Article	Ø mm	Pc/Pack	€/Pc	€/Pack
PSTRR	135	40	0,88	35,20

PRORAIL SYSTEM LAYING PATTERN

Material required for 1 gm of the below pattern:

- -3 pcs PROSUPPORT TUBE/PROSUPPORT TUBE SLIM
- -3 pcs fastening rings PRORAIL RING
- -2.7 lm PRORAIL joist
- -4 lm **PRORAIL RUBBER**

TECHINCAL LAYING INSTRUCTIONS

- 1. Choose the support PROSUPPORT TUBE or PROSUPPORT SLIM of the required height;
- 2. Set the fastening ring **PRORAIL RING** on the supports;
- 3. Set the joist PRORAIL (*) or the joist PRORAIL RET on the ring;
- 4. Insert the rubber PRORAIL RUBBER inside the grooves of the joist
- 5. Set the cross spacers **PRORAIL SPACER** following the laying pattern; (*) It is possible to fix the joist PRORAIL on the supports fixing it into the spacer flaps, see picture hereunder.







PSTRS 02

PSTRS 04

PRORAIL SPACER - CROSS SPACER with removable flaps polypropylene - Pack 100 Pcs

Article	thickness (mm)	Pc/Pack	€/Pc	€/Pack
PSTRS 02	2	100	0,76	76,00
PSTRS 04	4	100	0,88	88,00









ANTI-ROTATION CLIP - Pack 40 Pcs

Article	Pc/Pack	€/Pc	€/Pack
PSTCAR	40	1,05	42,00



Prosupport tube/slim + Prorail + Prorail spacer + Prorail rubber









Prosupport tube/slim + Prorail ring + Prorail ret





